



CHARLOTTE DEP CON 120.05 307.8 AWOS-3 120.825 GCO 121.725	RNAV 1 - DME/DME/IRU or GPS. RADAR required.	TOP ALTITUDE: 3000
--	---	-----------------------

TAKEOFF MINIMUMS

Rwy 6: 300-1¼ or standard with minimum climb of 268'/NM to 700.
Rwy 24: 300-1¼ or standard with minimum climb of 275'/NM to 700.

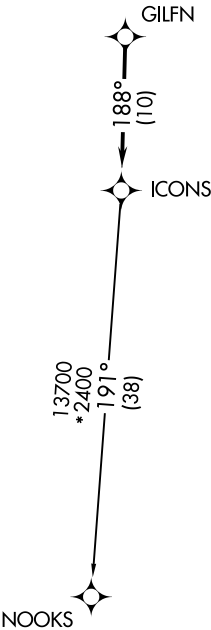

- NOTE: Turbojet only.
- NOTE: If unable to accept climb rates, advise ATC on initial contact.
- NOTE: Transponder code will be issued via PDC or CLT CLNC DEL.
- NOTE: Upon reaching 10000 MSL, accelerate to and maintain 280K, if unable advise ATC.



NOTE: Chart not to scale.

▼	DEPARTURE ROUTE DESCRIPTION
Climb on assigned heading for vectors to GILFN, then on track 188° to ICONS, then on NOOKS Transition. Maintain 3000, expect filed altitude 10 minutes after departure.	
NOOKS TRANSITION (ICONS8.NOOKS)	