


CHARLOTTE DEP CON 120.05 307.8 AWOS-3 120.825 GCO 121.725	RNAV 1 - DME/DME/IRU or GPS. RADAR required.	TOP ALTITUDE: 3000
--	---	-----------------------

TAKEOFF MINIMUMS
Rwy 6: 300-1¼ or standard with minimum climb of 268'/NM to 700.
Rwy 24: 300-1¼ or standard with minimum climb of 275'/NM to 700.

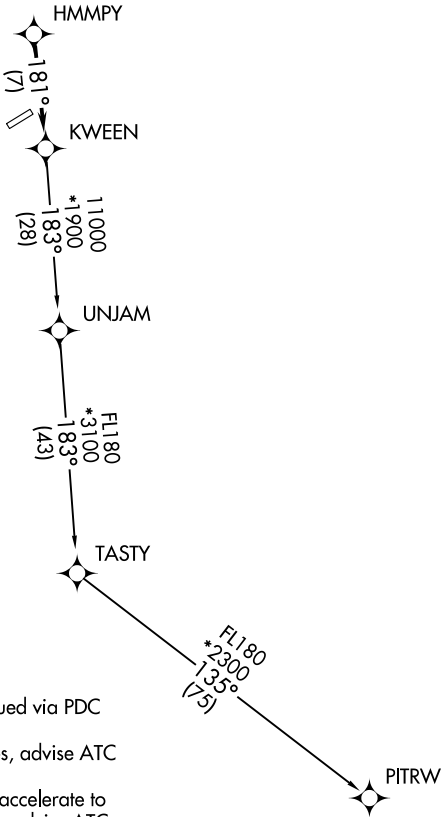

- NOTE: Turbojet only.
NOTE: Transponder code will be issued via PDC or CLT CLNC DEL.
NOTE: If unable to accept climb rates, advise ATC on initial contact.
NOTE: Upon reaching 10000 MSL, accelerate to and maintain 280K, if unable advise ATC.

DEPARTURE ROUTE DESCRIPTION

Climb on assigned heading for vectors to HMMPY, then on depicted route to KWEEN, then on transition. Maintain 3000, expect filed altitude 10 minutes after departure.

PITRW TRANSITION (KWEEN8.PITRW)
UNJAM TRANSITION (KWEEN8.UNJAM)

MSA LKR 25 NM

2300

NOTE: Chart not to scale.