


CHARLOTTE DEP CON
120.05 307.8
AWOS-3
120.825
GCO
121.725

RNAV 1 - DME/DME/IRU or GPS.


RADAR required.

TOP ALTITUDE:
3000

TAKEOFF MINIMUMS
Rwy 6: 300-1¼ or standard with minimum climb of 268'/NM to 700.
Rwy 24: 300-1¼ or standard with minimum climb of 275'/NM to 700.

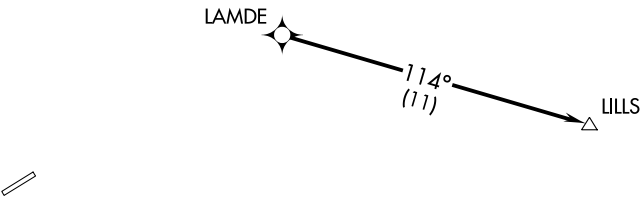

NOTE: Turbojet only.
NOTE: Transponder code will be issued via PDC or CLT CLNC DEL.
NOTE: If unable to accept climb rates, advise ATC on initial contact.
NOTE: Upon reaching 10000 MSL, accelerate to and maintain 280K, if unable advise ATC.



NOTE: Chart not to scale.

▼

DEPARTURE ROUTE DESCRIPTION

Climb on assigned heading for vectors to LAMDE, then on depicted route to LILLS.
Maintain 3000. Expect filed altitude 10 minutes after departure.

SE-2, 01 OCT 2026 to 29 OCT 2026

SE-2, 01 OCT 2026 to 29 OCT 2026