

WAAS CH 87104 W18A	APP CRS 185°	Rwy Ldg 5004 TDZE 418 Apt Elev 418
--	------------------------	---



RNAV (GPS) RWY 18
PERRY-HOUSTON COUNTY (PXE)

RNP APCH-GPS.

A For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. When local altimeter setting not received, use Middle Georgia Rgnl altimeter setting and increase LPV DA to 656 feet; increase LNAV/VNAV DA to 857 feet and all visibilities $\frac{1}{8}$ SM. Increase all MDAs 40 feet; and Circling visibility Cat A and D $\frac{1}{4}$ SM.

MISSED APPROACH: Climb to 2300 direct SCTRY and hold.

AWOS-3 123.825	ATLANTA APP CON ★ 124.2 279.6	UNICOM 122.725 (CTAF) 0
--------------------------	---	-----------------------------------

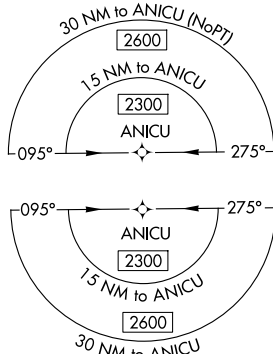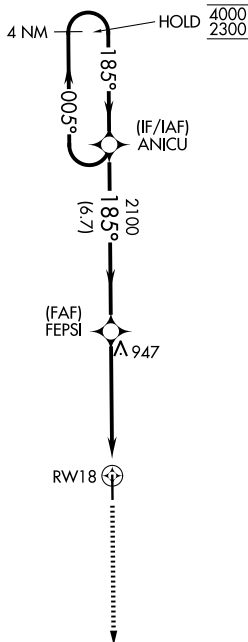

MISSED APCH FIX

SCTRY



4 NM Holding Pattern

ANICU

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 30).

2300 SCTR

4000 2300

←005° 185°→

185°

FEPSI

2100

2.4 NM to RW18

2100

6.7 NM

2.8 NM

2.4 NM

RW18

GP 3.00° TCH 40

CATEGORY	A	B	C	D
LPV DA	618- ³ / ₄ 200 (200- ³ / ₄)			
RNAV/ VNAV DA	819-1 ¹ / ₈ 401 (500-1 ¹ / ₈)			
RNAV MDA	1200-1 782 (800-1)	1200-1 ¹ / ₄ 782 (800-1 ¹ / ₄)	1200-2 ¹ / ₂	782 (800-2 ¹ / ₂)
CIRCLING	1200-1 782 (800-1)	1200-1 ¹ / ₄ 782 (800-1 ¹ / ₄)	1200-2 ¹ / ₂ 782 (800-2 ¹ / ₂)	1280-2 ³ / ₄ 862 (900-2 ³ / ₄)

