RNAV (GPS) RWY 21


ST CLAIR COUNTY (PLR)


WAAS	APP CRS	Rwy Ldg	5001
CH 78304	206°	TDZE	485
W21A		Apt Elev	485


DME/DME RNP-0.3 NA. When local altimeter setting not received, use Anniston altimeter setting and increase LPV DA to 799 feet and all Cats visibility to 1, increase LNAV/VNAV DA to 964 feet and all visibilities to 1⅝, increase all MDA 80 feet and LNAV Cat C/D to 1¾ and Circling Cat C to 2½ and Cat D to 3. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). Baro-VNAV and VDP NA when using Anniston altimeter setting.

MISSED APPROACH: Climb to 4000 direct HANUR and hold, continue climb-in-hold to 4000.

AWOS-3P	BIRMINGHAM APP CON	CLNC DEL	UNICOM
119.625	123.8 256.8	121.725 (GCO)	123.05 (CTAF) L

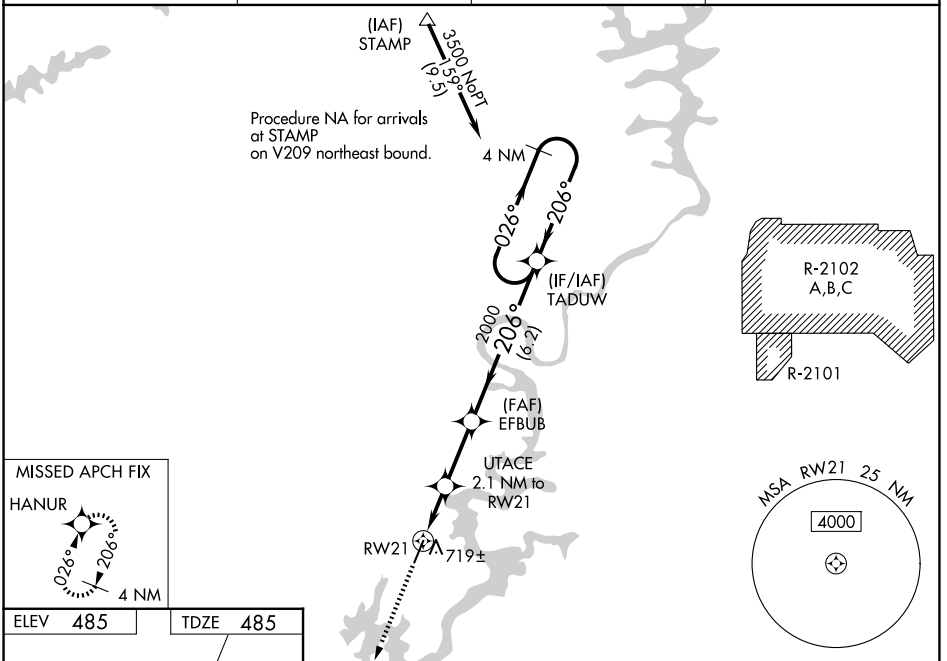

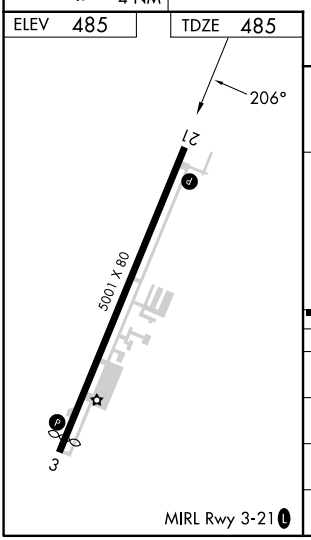

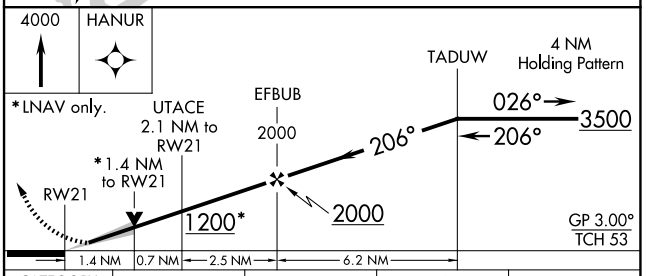

CATEGORY	A	B	C	D
LPV DA	735-¾ 250 (300-¾)			
LNAV/VNAV DA	900-1⅜ 415 (500-1⅜)			
LNAV MDA	980-1 495 (500-1)		980-1⅜ 495 (500-1⅜)	
CIRCLING	1180-1 695 (700-1)		1240-2¼ 755 (800-2¼)	1340-2¾ 855 (900-2¾)

SE-4, 01 OCT 2026 to 29 OCT 2026
SE-4, 01 OCT 2026 to 29 OCT 2026