

|                                        |                        |                                                   |
|----------------------------------------|------------------------|---------------------------------------------------|
| WAAS<br>CH <b>69205</b><br><b>W17A</b> | APP CRS<br><b>170°</b> | Rwy Ldg<br>TDZE <b>763</b><br>Apt Elev <b>763</b> |
|----------------------------------------|------------------------|---------------------------------------------------|

RNAV (GPS) RWY 17

HURON COUNTY MEML (BAX)

RNP APCH - GPS.


▼

⚠

Baro-VNAV NA when using MBS altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. When local altimeter setting not received, use MBS altimeter setting: increase LPV DA to 1205 feet and all visibilities  $\frac{3}{8}$  SM; increase LNAV/VNAV DA to 1482 feet; increase all MDAs 140 feet and LNAV visibility Cat C  $\frac{3}{8}$  SM. Rwy 17 helicopter visibility reduction below  $\frac{3}{4}$  SM NA.

MISSED APPROACH: Climb to 3000 direct AREBE and hold.

|                         |                                          |                                   |
|-------------------------|------------------------------------------|-----------------------------------|
| AWOS-3P<br><b>118.6</b> | CLEVELAND CENTER<br><b>127.7 290.425</b> | UNICOM<br><b>123.075 (CTAF) 0</b> |
|-------------------------|------------------------------------------|-----------------------------------|

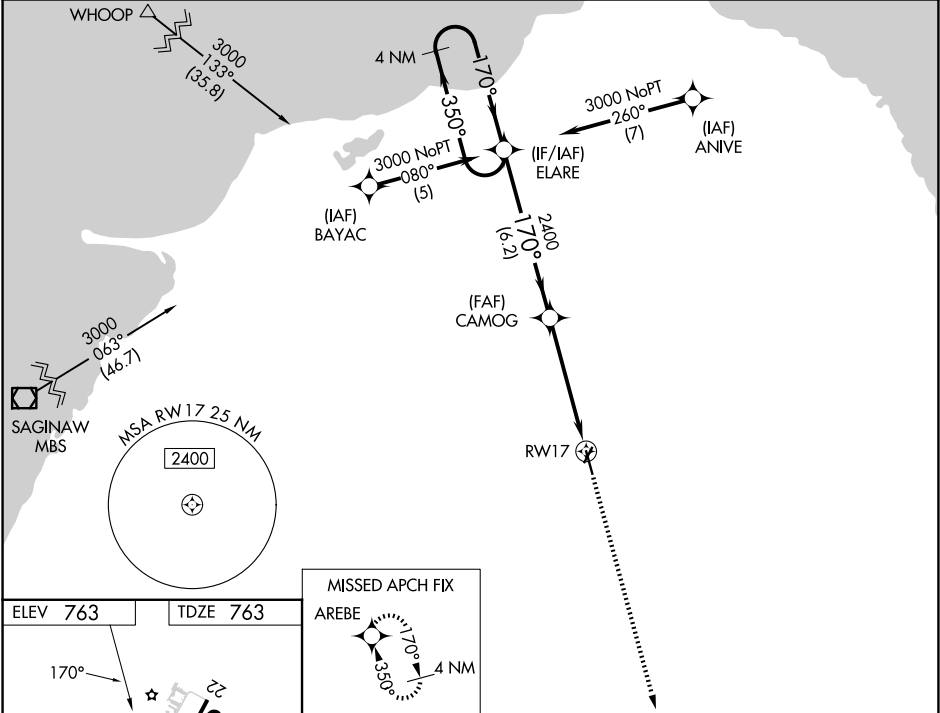

ELEV 763

TDZE 763

REIL RWys 17 and 35 1  
MIRL RWys 4-22 and 17-35 1

|                                |        |             |                            |
|--------------------------------|--------|-------------|----------------------------|
| MISSED APCH FIX                |        |             |                            |
| AREBE                          |        |             |                            |
| 4 NM Holding Pattern ELARE     |        |             |                            |
| 3000 350° 170° GP 3.00° TCH 40 |        |             |                            |
| CAMOG 2400 RW17 6.2 NM 4.9 NM  |        |             |                            |
| CATEGORY                       | A      | B           | C                          |
| LPV DA                         | 1075-1 | 312 (400-1) | NA                         |
| LNAV/VNAV DA                   | 1352-2 | 589 (600-2) | NA                         |
| LNAV MDA                       | 1220-1 | 457 (500-1) | 1220-1 3/8 457 (500-1 3/8) |