



WAAS CH 93905 W34A	APP CRS 338°	Rwy Idg 4500 TDZE 462 Apt Elev 462	RNAV (GPS) RWY 34 CREVE COEUR (1H0)
--	------------------------	---	---

RNP APCH.	MISSED APPROACH: Climb to 2700 direct AJUBA and hold.
▼ ▲ NA Use St Louis Lambert Intl altimeter setting. Baro-VNAV NA. Circling Rwy 16 NA at night. Circling NA to Rwy 7 and 25. Rwy 34 helicopter visibility reduction below ¾ SM NA.	

ST. LOUIS APP CON 126.5 254.3	UNICOM 122.8 (CTAF) 0
---	---------------------------------

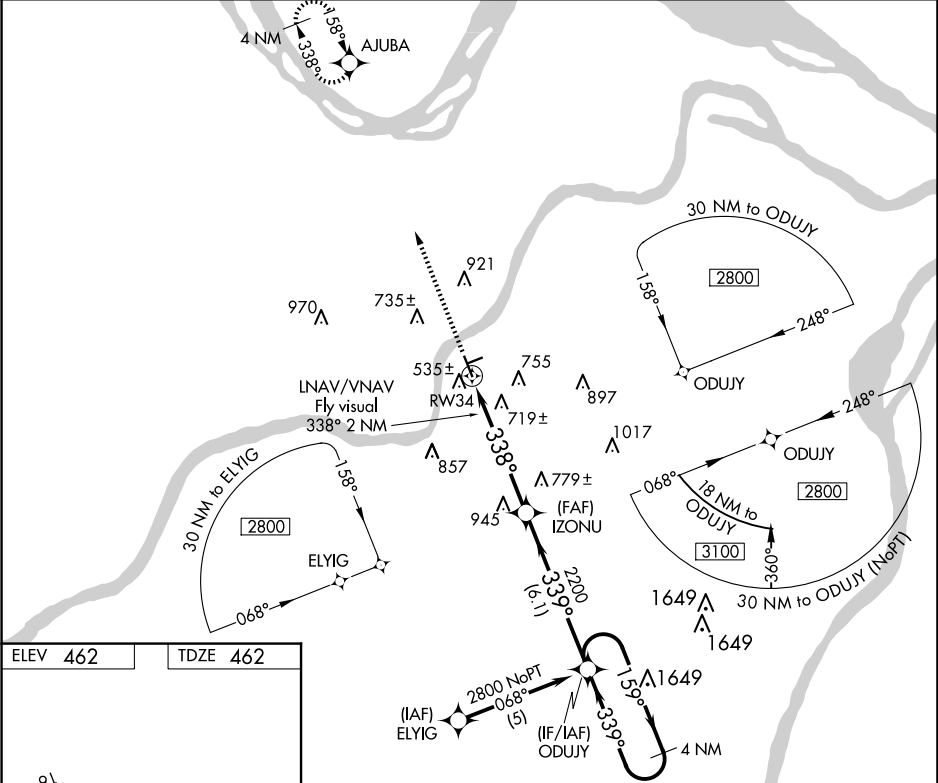

ELEV 462	TDZE 462
-----------------	-----------------

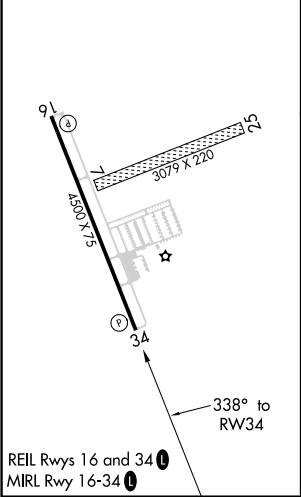

2700	AJUBA	VGSi and RNAV glidepath not coincident (VGSi Angle 3.00/TCH 43).	4 NM Holding Pattern
	IZONU	ODUJY	
INAV/VNAV Fly visual 338° 2 NM	RW34	338°	339°
	5.3 NM	6.1 NM	
CATEGORY	A	B	C
LPV DA	809-1¼ 347 (400-1¼)		NA
INAV/VNAV DA	1131-2 669 (700-2)		NA
INAV MDA	1080-1 618 (700-1)		NA
CIRCLING	1080-1 618 (700-1)	1120-1 658 (700-1)	NA