

WAAS CH 42505 W31A	APP CRS 314°	Rwy Ldg 6500 TDZE 487 Apt Elev 501
--	------------------------	---

RNAV (GPS) RWY 31

LANCASTER RGNL (LNC)

RNP APCH - GPS.


▼

▲

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. Baro-VNAV NA when using RBD altimeter setting. When local altimeter setting not received, use RBD altimeter setting: increase LPV DA to 732 feet; increase LNAV/VNAV DA to 970 feet; increase all MDAs 60 feet and LNAV visibility Cat C ¼ SM, LNAV visibility Cat D ½ SM, and Circling visibility Cats C/D ¼ SM.

MISSED APPROACH: Climb to 2000 direct DOCAV and right turn on track 053° to WARER then climb to 3000 on track 053° to SOLDO and hold.

AWOS-3PT 118.975	LONE STAR APP CON 125.2 343.65	UNICOM 122.7 (CTAF) 0
----------------------------	--	---------------------------------

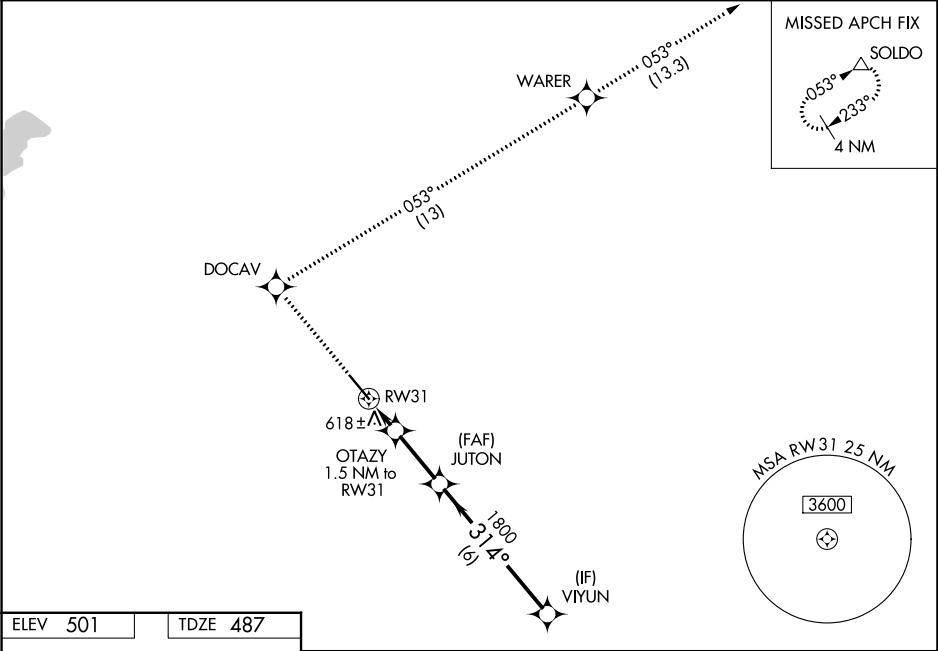

ELEV 501	TDZE 487
----------	----------

2000

DOCAV

WARER

3000

SOLDO

↑

tr 053°

tr 053°

VIYUN

2700

GP 3.00°

TCH 50

OTAZY

1.5 NM to RW31

RW31

JUTON

1800

1000

1800

314°

1.5 NM

2.5 NM

6 NM

CATEGORY	A	B	C	D
LPV DA	687-¾ 200 (200-¾)			
LNAV/VNAV DA	925-1½ 438 (500-1½)			
LNAV MDA	880-1	393 (400-1)	880-1⅛ 393 (400-1⅛)	880-1¼ 393 (400-1¼)
CIRCLING	980-1 479 (500-1)	1020-1 519 (600-1)	1300-2¼ 799 (800-2¼)	1300-2½ 799 (800-2½)