

VENICE, FLORIDA

AL-5960 (FAA)

26078

WAAS CH 53433 W23A	APP CRS 230°	Rwy Ldg 4377 TDZE 18 Apt Elev 18
--	------------------------	---

RNAV (GPS) RWY 23


VENICE MUNI (VNC)

T When local altimeter setting not received, use Sarasota altimeter setting and increase all MDA 60 feet and increase LP and LNAV Cats C, D visibility $\frac{1}{8}$ mile, and Circling Cat C visibility $\frac{1}{4}$ mile.

A DME/DME RNP-0.3 NA. VDP NA with Sarasota altimeter setting. Helicopter visibility reduction below $\frac{3}{4}$ SM NA.

MISSED APPROACH:
Climb to 2900 direct
WUPOS and hold.

AWOS-3 119.275	TAMPA APP CON 119.65 353.575	UNICOM 122.725 (CTAF) 0
--------------------------	--	-----------------------------------

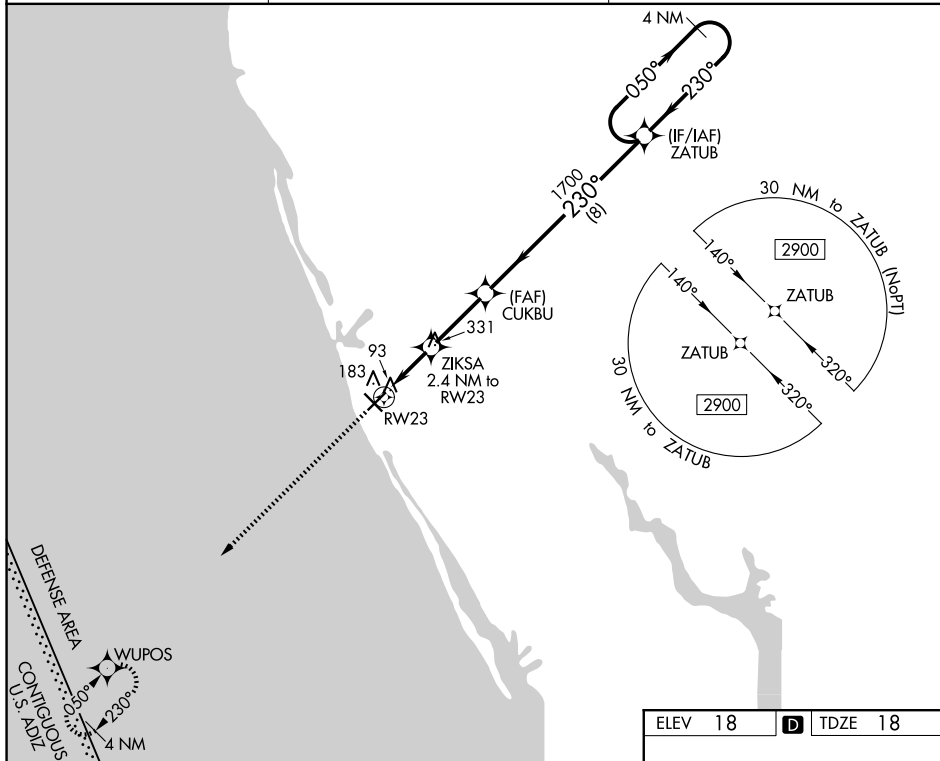

2900 ↑	WUPOS ✦	4 NM Holding Pattern			

The diagram shows two intersecting track lines. The horizontal track is labeled 'ELEV 18' at the left end and 'TDZE 18' at the right end. The vertical track is labeled '230°' at the top right end. The intersection is marked with a star. The horizontal track has a width of 5440 X 150. The vertical track has a width of 5050 X 150. The horizontal track is labeled '5-1' at the left end and '5-3' at the right end. The vertical track is labeled '5-1' at the top end and '5-3' at the bottom end. The horizontal track has a 'P' in a circle at the left end and a '1' in a circle at the right end. The vertical track has a '1' in a circle at the top end and a '3' in a circle at the bottom end.

VENICE, FLORIDA
Orig-B 16OCT14

27°04'N-82°26'W

VENICE MUNI (VNC)

RNAV (GPS) RWY 23

SE-3, 01 OCT 2026 to 29 OCT 2026