

WAAS CH 40324 W19A	APP CRS 193°	Rwy Idg TDZE 804 Apt Elev 817
--	------------------------	---

RNAV (GPS) RWY 19

DOUGLAS HUNTER FLD (1M5)

RNP APCH.



▼

▲

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. Baro-VNAV and VDP NA when using Bowling Green altimeter setting. When local altimeter setting not received, use Bowling Green altimeter setting and increase LPV DA to 1144 and all visibilities ¼ mile; increase all LNAV/VNAV DA to 1184 and all visibilities ¼ mile; increase all MDA 100 feet and increase LNAV Cat C/D visibility ⅜ mile.

MISSED APPROACH: Climb to 3000 direct COLBU and hold.

AWOS-3PT 118.175	NASHVILLE APP CON 119.35 372.0	UNICOM 122.975 (CTAF) 0
----------------------------	--	-----------------------------------

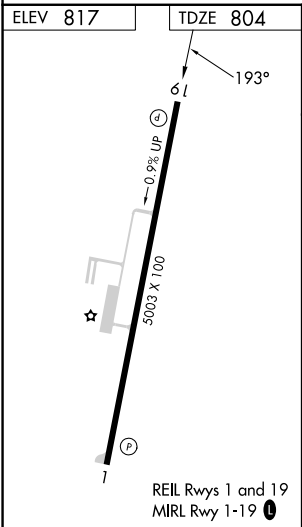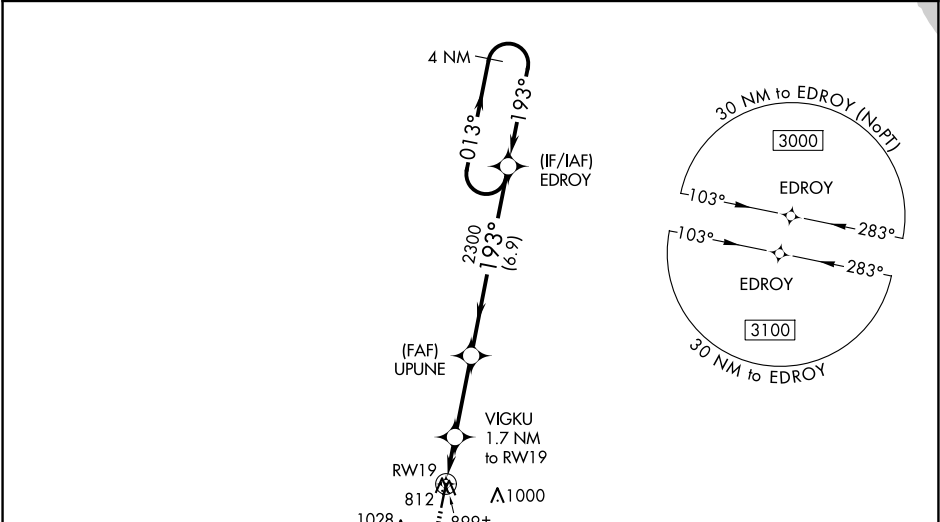

3000				
COLBU				
VGSi and RNAV glidepath not coincident.				
4 NM Holding Pattern				
*LNAV only.				
VIGKU 1.7 NM to RW19				
UPUNE 2300				
RW19 1.2 NM to RW19				
1340*				
1.2 NM 0.5 3 NM 6.9 NM				
CATEGORY	A	B	C	D
LPV DA	1054-1 250 (300-1)			
LNAV/VNAV DA	1094-1½ 290 (300-1½)			
LNAV MDA	1160-1 356 (400-1)			