RNAV (GPS) Y RWY 5

NAPLES MUNI (APF)


WAAS	APP CRS	Rwy Ldg	5000
CH 88239	047°	TDZE	8
W05B		Apt Elev	8

RNP APCH - GPS.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 6°C or above 50°C.

MISSED APPROACH: Climb to 500 then climbing right turn to 2100 direct EVRGD and hold.


ATIS	FORT MYERS APP CON★	NAPLES TOWER★	GND CON
134.225	119.75 371.85 (W) 124.125 371.85 (E)	128.5 (CTAF) L	121.6

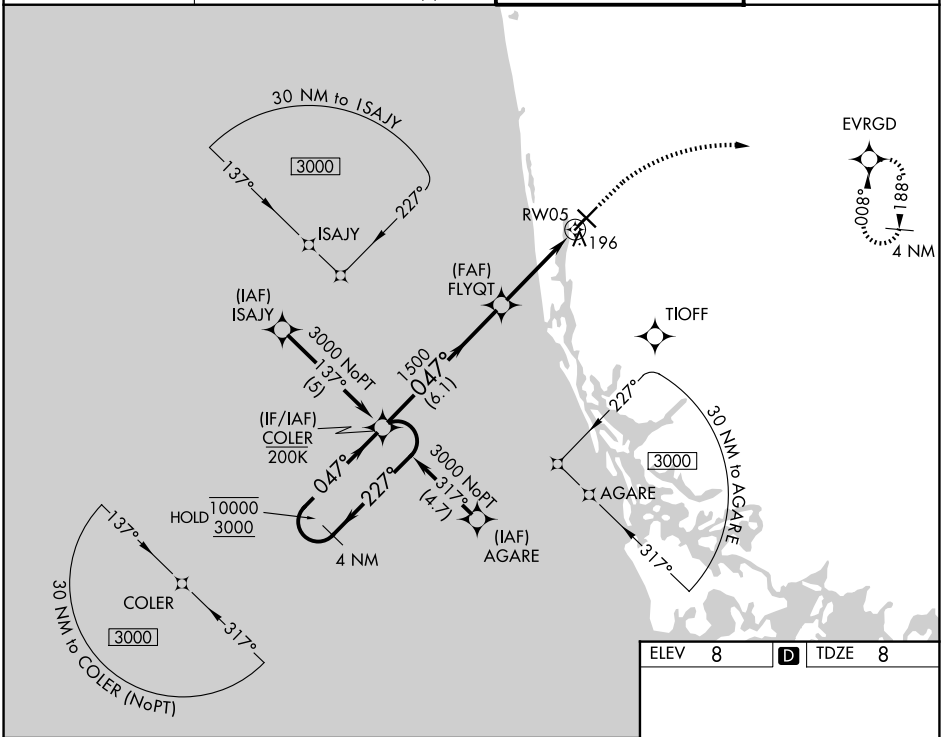

4 NM Holding Pattern


VGSI and RNAV glidepath not coincident (VGSI Angle 3.50/TCH 31).

500 2100 EVRGD

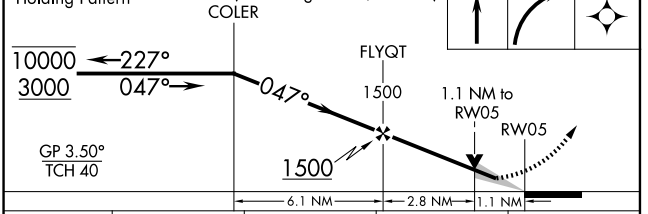

CATEGORY	A	B	C	D
LPV DA		278-1	270 (300-1)	
LNAV/VNAV DA		357-1	349 (400-1)	
LNAV MDA	460-1 452 (500-1)		460-1⅜ 452 (500-1⅜)	
CIRCLING	500-1 492 (500-1)		620-1¾ 612 (700-1¾)	760-2½ 752 (800-2½)

ELEV 8 D TDZE 8



REIL Rwys 5, 14, 23 and 32 L

MIRL Rwys 5-23 and 14-32 L

SE-3, 01 OCT 2026 to 29 OCT 2026
SE-3, 01 OCT 2026 to 29 OCT 2026