


WAAS CH 58109 W02A	APP CRS 021°	Rwy Ldg 7026 TDZE 913 Apt Elev 913
--	------------------------	---

RNAV (GPS) RWY 2

RNP APCH - GPS. ▼ Baro-VNAV and VDP NA when using ARR altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. When local altimeter setting not received, use ARR altimeter setting; increase LPV DA to 1268 feet and all visibilities $\frac{1}{2}$ SM; increase LNAV/VNAV DA to 1421 feet; increase all MDAs 80 feet and LNAV visibility Cat C $\frac{1}{2}$ SM and Circling visibility Cats C/D $\frac{1}{4}$ SM. For inop ALS, increase LPV all Cats visibility to $\frac{1}{2}$ SM.		MALSR 	MISSED APPROACH: Climb to 3000 direct JUDVI and via 057° track to YEARN and hold.
AWOS-3 119.075	CHICAGO APP CON 133.5 349.0	UNICOM 122.7 (CTAF) 	

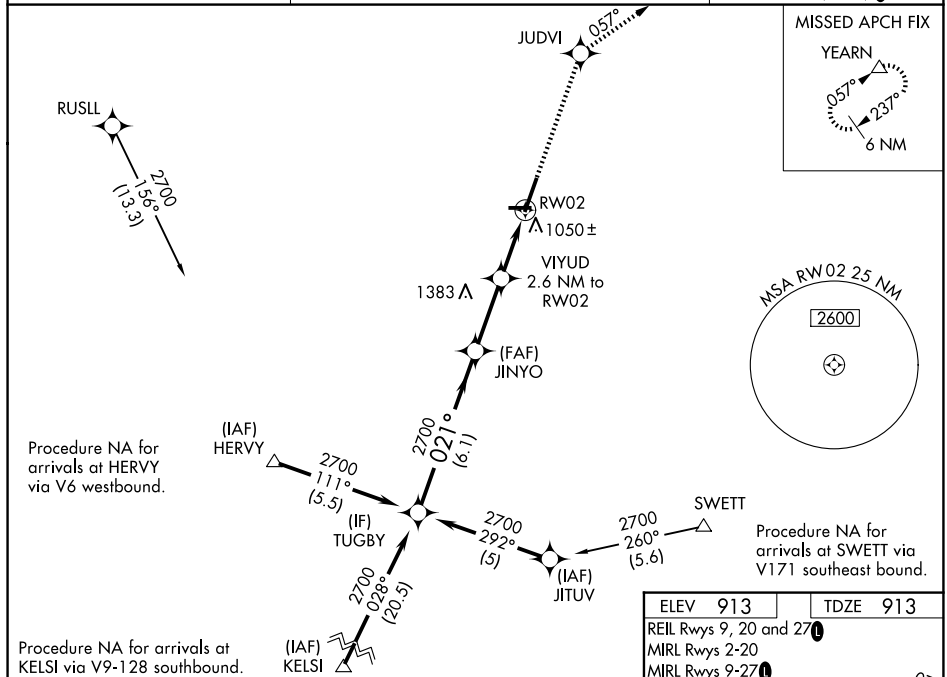

Procedure Turn NA	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 53).			3000 ↑	JUDVI ✦	tr 057°	YEAR △
TUGBY	JINYO 2700			VIIYUD 2.6 NM to RW02			
2700	021°			1800	1.2 NM to RW02	RW02	
GP 3.00° TCH 55	6.1 NM			2.8 NM	1.4 NM	1.2 NM	
CATEGORY	A		B	C	D		
LPV DA	1207-½		294 (300-½)				
RNAV/ VNAV DA	1360-1		447 (500-1)				
RNAV MDA	1360-½ 447 (500-½)		1360-⅞ 447 (500-⅞)	1360-1 447 (500-1)			
CIRCLING	1360-1 447 (500-1)	1500-1 587 (600-1)	1600-2 687 (700-2)	1740-2¾ 827 (900-2¾)			

