
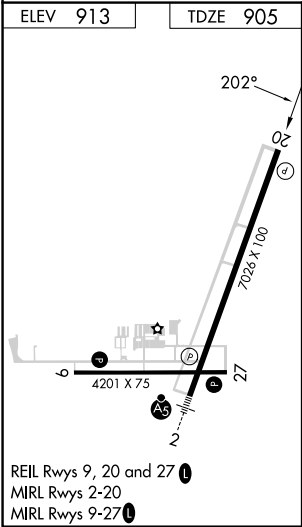


WAAS CH 50409 W20A	APP CRS 202°	Rwy Ldg TDZE 905 Apt Elev 913
--	------------------------	---

RNAV (GPS) RWY 20
DE KALB TAYLOR MUNI (DKB)

Baro-VNAV NA when using Aurora altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 47°C (116°F). DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA. VDP NA when using Aurora altimeter setting. When local altimeter setting not received, use Aurora altimeter setting and increase all DA 61 feet and all MDA 80 feet; increase all LPV and LNAV/VNAV visibilities, LNAV Cat D visibility, and Circling Cats C/D visibility ¼ mile.	MISSED APPROACH: Climb to 2700 direct TUGBY and hold.	
AWOS-3 119.075	CHICAGO APP CON 133.5 349.0	UNICOM 122.7 (CTAF) 0

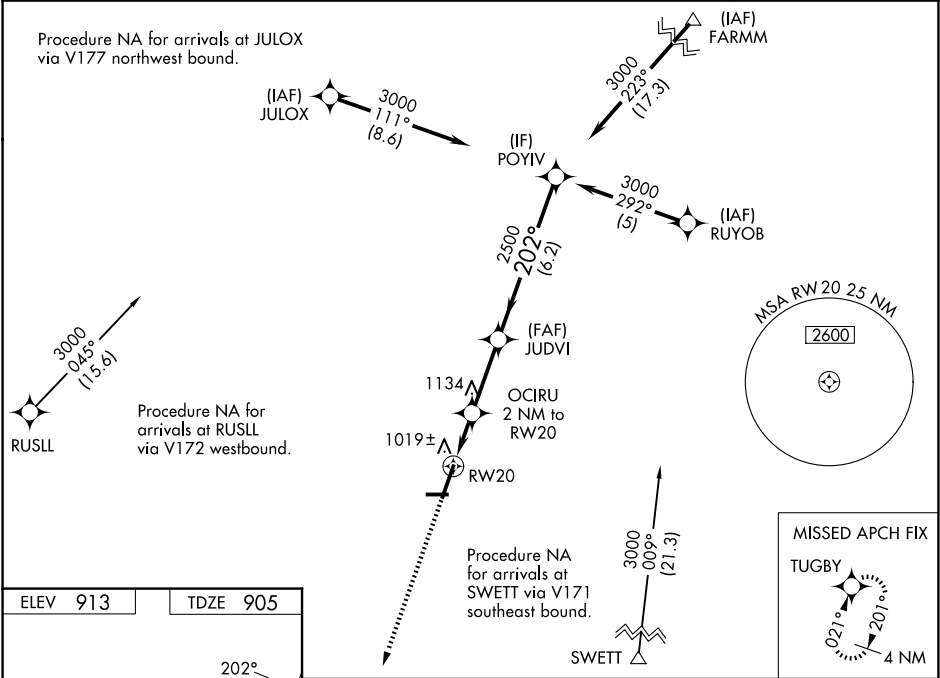

EC-3, 01 OCT 2026 to 29 OCT 2026

EC-3, 01 OCT 2026 to 29 OCT 2026