

WAAS

CH **45905**

W22A

APP CRS

215°

Rwy Ldg

7193

TDZE

26

Apt Elev

26


RNAV (GPS) RWY 22

PUNTA GORDA (PGD)

⚠ Baro-VNAV NA when using Page Fld altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 1°C or above 54°C. When local altimeter setting not received, use Page Fld altimeter setting and increase LPV DA to 276, LNAV/VNAV DA to 360, and all MDAs 60 feet; increase LNAV Cats C and D visibility ¼ SM, and Circling Cats C and D visibility ¼ SM.

MISSED APPROACH: Climb to 2000 direct BULOW and hold.

ATIS 135,675	FORT MYERS APP CON★ 127.05 306.2	PUNTA GORDA TOWER★ 121.0 (CTAF) 0	GND CON 119.55	UNICOM 122,975
------------------------	--	---	--------------------------	--------------------------

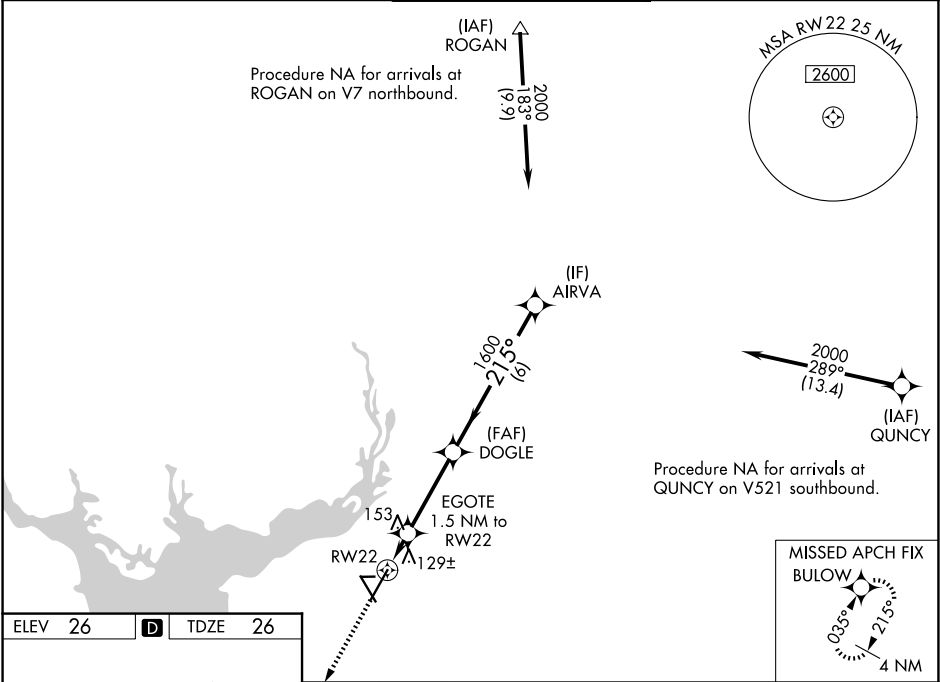

*LNNAV only.				
EGOTE 1.5 NM to RW22				
DOGLE				
AIRVA				
2000				
GP 3.00° TCH 40				
1.5 NM 3.3 NM 6 NM				
CATEGORY	A	B	C	D
LPV DA	226-3/4		200 (200-3/4)	
LNAV/VNAV DA	310-1		284 (300-1)	
LNAV MDA	420-1	394 (400-1)	420-1 1/8	394 (400-1 1/8)
CIRCLING	460-1 434 (500-1)	580-1 554 (600-1)	600-1 1/2 574 (600-1 1/2)	740-2 1/4 714 (800-2 1/4)