

WAAS CH 53447 W35A	APP CRS 349°	Rwy Ldg 4200 TDZE 1047 Apt Elev 1047
--	------------------------	---

RNAV (GPS) RWY 35


DECATUR MUNI (LUD)

RNP APCH - GPS.

- T** Rwy 35 helicopter visibility reduction below $\frac{3}{4}$ SM NA. Baro-VNAV and VDP NA when using FTW
A altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or
above 54°C. When local altimeter setting not received, use FTW altimeter setting and
increase LPV DA to 1408 feet; increase LNAV/VNAV DA to 1661 feet and all visibilities $\frac{3}{8}$ SM;
increase all MDAs 120 feet.

MISSED APPROACH:
Climb to 1700 then
climbing left turn to
3000 direct RALAE
and hold.

AWOS-3 118.225	LONE STAR APP CON 118.1 306.95	UNICOM 123.075 (CTAF) 0
--------------------------	--	-----------------------------------

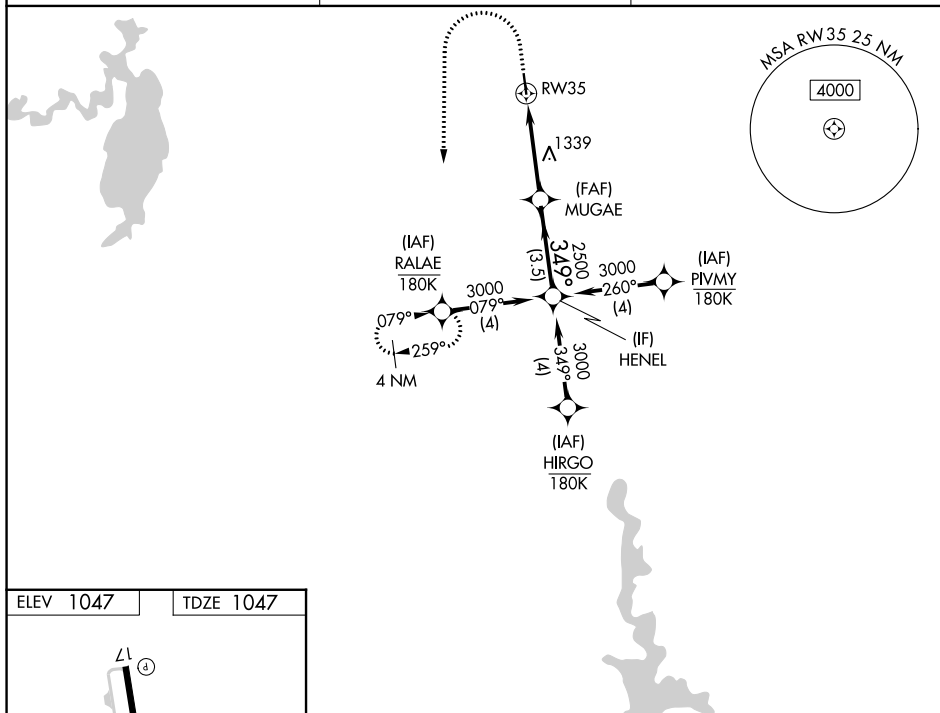

CATEGORY	A	B	C	D
LPV DA	1297-1	250 (300-1)	NA	
LNAV/VNAV	1550-1 $\frac{3}{8}$	503 (600-1 $\frac{3}{8}$)	NA	
LNAV MDA	1600-1	553 (600-1)	NA	
CIRCLING	1600-1	553 (600-1)	NA	