

|                                        |                        |                                                 |
|----------------------------------------|------------------------|-------------------------------------------------|
| WAAS<br>CH <b>97635</b><br><b>W05A</b> | APP CRS<br><b>049°</b> | Rwy Ldg<br>TDZE <b>40</b><br>Apt Elev <b>40</b> |
|----------------------------------------|------------------------|-------------------------------------------------|

RNAV (GPS) RWY 5

GEORGETOWN COUNTY (GGE)

RNP APCH.

▼


▲

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. Rwy 5 helicopter visibility reduction below ¾ SM NA. For inop ALS, increase LNAV/VNAV visibility Cats A/B to ¾ SM. Inop table does not apply to LPV all Cats. Circling Rwy 11, 29 NA at night.

ODALS

MISSED APPROACH:  
Climb to 2000 direct  
OTVOE and hold.

|                          |                                               |                       |                                        |
|--------------------------|-----------------------------------------------|-----------------------|----------------------------------------|
| AWOS-3<br><b>118.275</b> | MYRTLE BEACH APP CON ★<br><b>127.4 257.95</b> | GCO<br><b>121.725</b> | UNICOM<br><b>123.0</b> (CTAF) <b>1</b> |
|--------------------------|-----------------------------------------------|-----------------------|----------------------------------------|

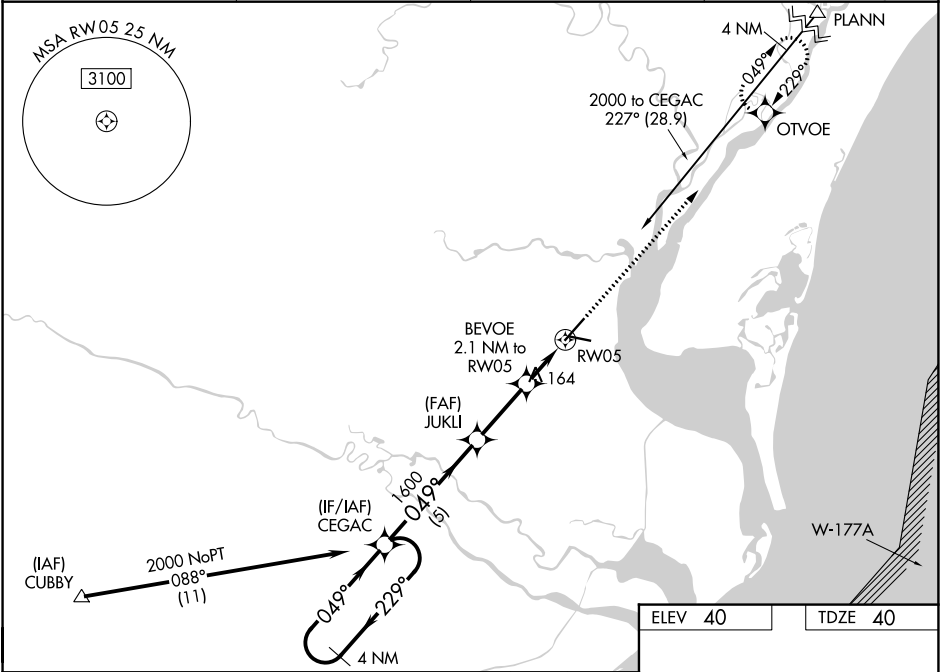

4 NM Holding Pattern

CEGAC

2000

229°

049°

GP 3.00°

TCH 41

1600

JUKLI

1600

BEVOE

2.1 NM to RW05

\*1.3 NM to RW05

RW05

\*740

5 NM

2.7 NM

0.8


1.3

2000

OTVOE

\*LNAV only.

| CATEGORY     | A                    | B                    | C                    | D                      |
|--------------|----------------------|----------------------|----------------------|------------------------|
| LPV DA       |                      | 290-¾                | 250 (300-¾)          |                        |
| LNAV/VNAV DA |                      | 304-¾                | 264 (300-¾)          |                        |
| LNAV MDA     | 480-¾                | 440 (500-¾)          | 480-1⅞               | 440 (500-1⅞)           |
| CIRCLING     | 500-1<br>460 (500-1) | 520-1<br>480 (500-1) | 740-2<br>700 (700-2) | 740-2¼<br>700 (700-2¼) |

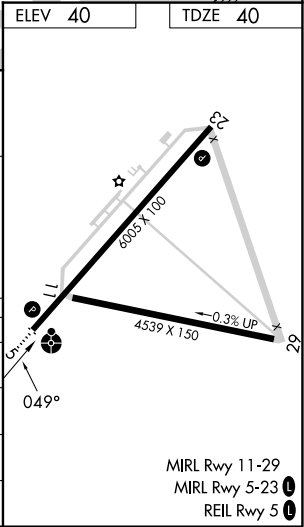

SE-2, 01 OCT 2026 to 29 OCT 2026

SE-2, 01 OCT 2026 to 29 OCT 2026