WAAS	APP CRS	Rwy Ldg	4007
CH 45933	315°	TDZE	820
W31A		Apt Elev	820

RNAV (GPS) RWY 31

HALLOCK MUNI (HCO)

RNP APCH-GPS.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. When local altimeter setting not received, use Grafton altimeter setting and increase LPV DA To 1082 feet; increase LNAV/VNAV DA to 1132 feet; increase all MDAs 80 feet and LNAV visibility Cat C ⅜ SM, and Circling visibility Cat C ¼ SM. Baro-VNAV and VDP NA when using Grafton altimeter setting.

MISSED APPROACH: Climb to 3300 direct FESNI and hold, continue climb-in-hold to 3300.

AWOS-3	MINNEAPOLIS CENTER	UNICOM
126.475	132.15 269.6	122.8 (CTAF) L

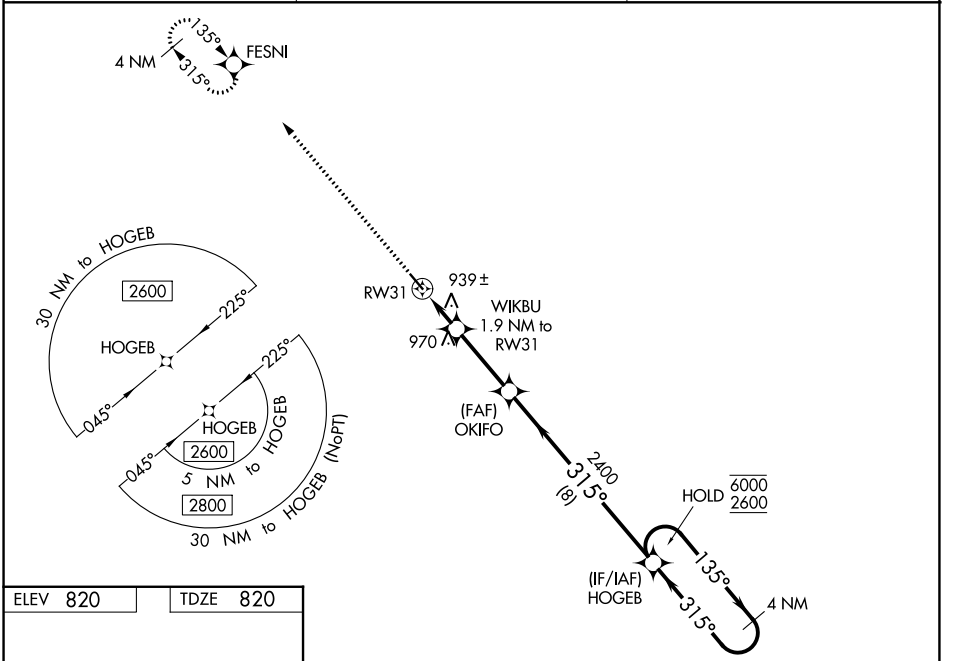

ELEV 820 TDZE 820



REIL Rwys 13 and 31 L
MIRL Rwy 13-31 L

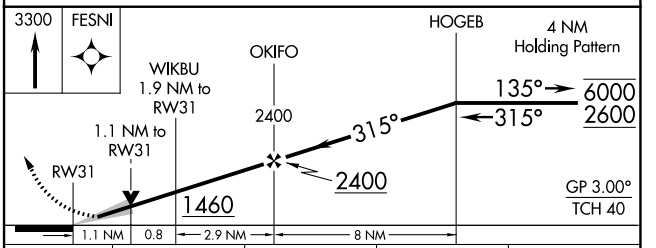

CATEGORY	A	B	C	D
LPV DA	1020-1 200 (200-1)			NA
LNAV/VNAV DA	1070-1 250 (300-1)			NA
LNAV MDA	1200-1 380 (400-1)			NA
CIRCLING	1380-1 560 (600-1)		1380-1½ 560 (600-1½)	NA

NC-1, 01 OCT 2026 to 29 OCT 2026
NC-1, 01 OCT 2026 to 29 OCT 2026