


|                                        |                        |                                                   |                                         |
|----------------------------------------|------------------------|---------------------------------------------------|-----------------------------------------|
| WAAS<br>CH <b>86922</b><br><b>W03A</b> | APP CRS<br><b>033°</b> | Rwy Idg<br>TDZE <b>714</b><br>Apt Elev <b>718</b> | <b>5001</b><br><b>714</b><br><b>718</b> |
|----------------------------------------|------------------------|---------------------------------------------------|-----------------------------------------|

RNAV (GPS) RWY 3  
MARK ANTON (2A0)

Baro-VNAV NA when using Chattanooga altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 39°C (102°F). DME/DME RNP-0.3 NA. VDP NA with Chattanooga altimeter setting. When VGSi inop, Circling Rwy 21 NA at night. When local altimeter setting not received, use Chattanooga altimeter setting: increase LPV DA to 1039 feet, LNAV/VNAV DA to 1288 feet, and visibility LPV and LNAV/VNAV all Cats ½ SM; increase all MDA 80 feet and visibility LNAV Cat C/D ¼ SM and Circling Cat C ½ SM. Rwy 3 helicopter visibility reduction below ¾ SM NA. Rwy 21 helicopter visibility reduction below 1 SM NA.

MISSED APPROACH:  
Climb to 3900 direct  
WATTZ and hold.

|                          |                                             |                               |
|--------------------------|---------------------------------------------|-------------------------------|
| AWOS-3<br><b>135.075</b> | CHATTANOOGA APP CON ★<br><b>125.1 379.1</b> | UNICOM<br><b>123.0</b> (CTAF) |
|--------------------------|---------------------------------------------|-------------------------------|

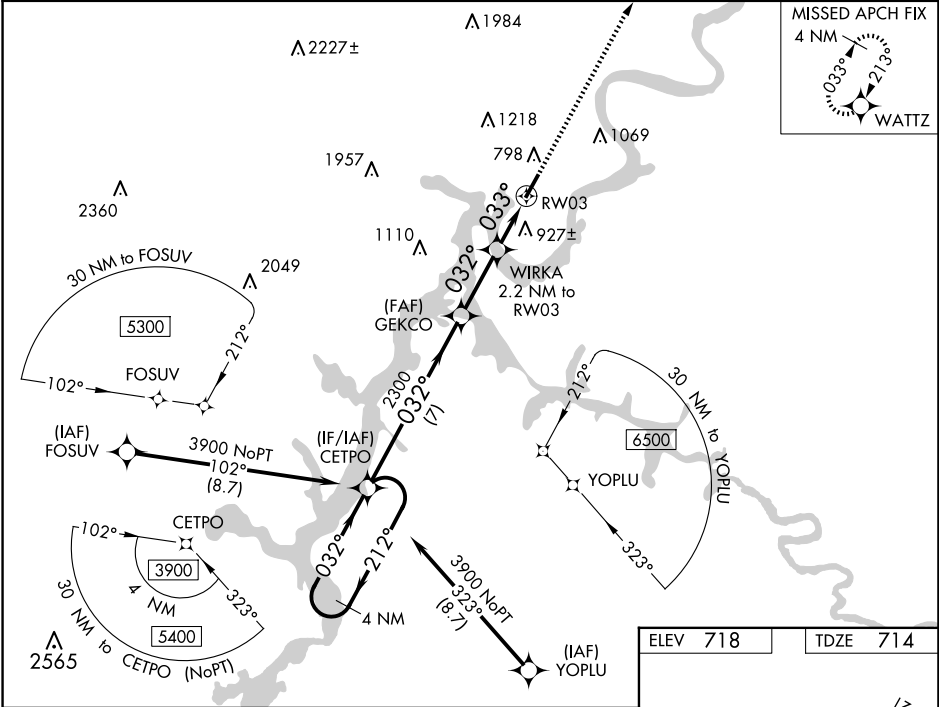

|                      |  |             |  |                |  |                |  |                |  |
|----------------------|--|-------------|--|----------------|--|----------------|--|----------------|--|
| 4 NM Holding Pattern |  | CETPO       |  | GEKCO          |  | WIRKA          |  | RW03           |  |
| 3900                 |  | 212°        |  | 032°           |  | 032°           |  | 033°           |  |
| GP 3.00°             |  | TCH 31      |  | 2300           |  | 2300           |  | 2300           |  |
| 7 NM                 |  | 2.7 NM      |  | 0.8 NM         |  | 1.4 NM         |  | 1.4 NM         |  |
| A                    |  | B           |  | C              |  | D              |  | E              |  |
| LPV DA               |  | 964-7/8     |  | 250 (300-7/8)  |  |                |  |                |  |
| LNAV/VNAV DA         |  | 1213-13/4   |  | 499 (500-13/4) |  |                |  |                |  |
| LNAV MDA             |  | 1180-1      |  | 466 (500-1)    |  | 1180-13/8      |  | 466 (500-13/8) |  |
| CIRCLING             |  | 1380-1      |  | 1420-1         |  | 1520-21/4      |  | 1620-3         |  |
|                      |  | 662 (700-1) |  | 702 (800-1)    |  | 802 (900-21/4) |  | 902 (1000-3)   |  |

