RNAV (GPS) RWY 26

CAMILLA-MITCHELL COUNTY (CXU)


WAAS	APP CRS	Rwy Ldg	5004
CH 86233	264°	TDZE	176
W26A		Apt Elev	176

RNP APCH - GPS.


T A For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). Rwy 26 helicopter visibility reduction below ¾ SM NA. Baro-VNAV and VDP NA when using ABY altimeter setting. When local altimeter setting not received, use ABY altimeter setting: increase LPV DA to 510 feet and all visibilities ⅛ SM; increase LNAV/VNAV DA to 615 feet and all visibilities ⅛ SM; increase all MDAs 60 feet and LNAV visibility Cats C/D ¼ SM, and Circling visibility Cat D ¼ SM.

MISSED APPROACH: Climb to 2200 direct CEGUK and hold.

AWOS-3PT	JACKSONVILLE CENTER	UNICOM
118.675	125.75 363.075	122.8 (CTAF) L

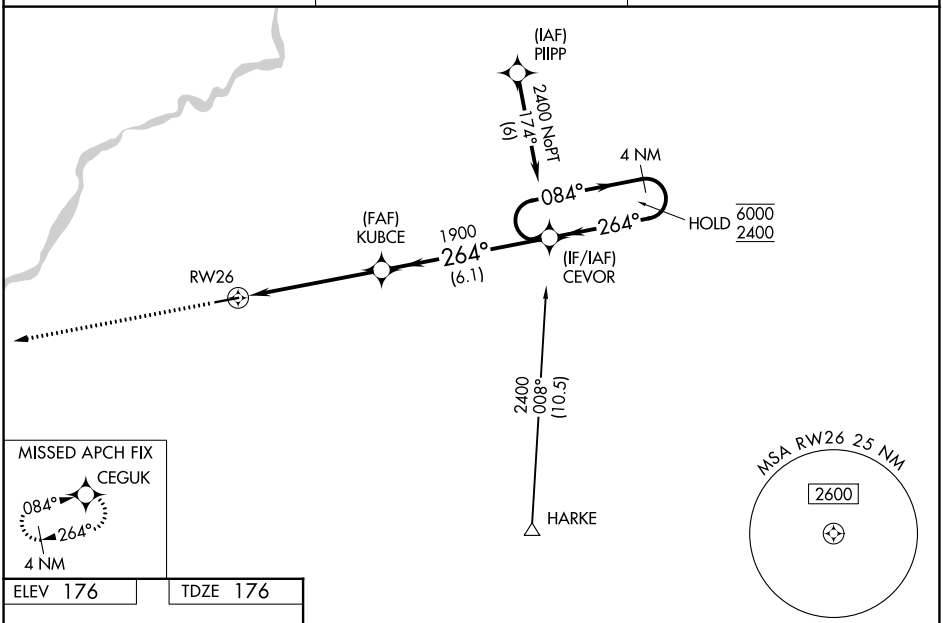


ELEV 176	TDZE 176



REIL Rwys 8 and 26 L
MIRL Rwy 8-26 L

2200 CEGUK

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 39).

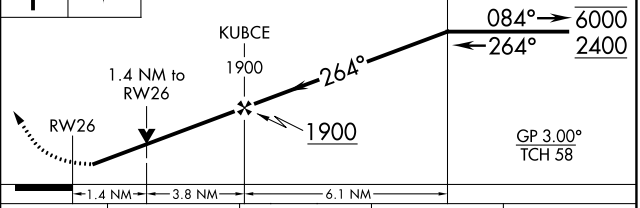

CATEGORY	A	B	C	D
LPV DA	463-⅞	287 (300-⅞)		
LNAV/VNAV DA	568-1⅛	392 (400-1⅛)		
LNAV MDA	660-1	484 (500-1)	660-1⅜	484 (500-1⅜)
CIRCLING	720-1 544 (600-1)	760-1 584 (600-1)	900-2¼ 724 (800-2¼)	940-2½ 764 (800-2½)

SE-4, 01 OCT 2026 to 29 OCT 2026
SE-4, 01 OCT 2026 to 29 OCT 2026