
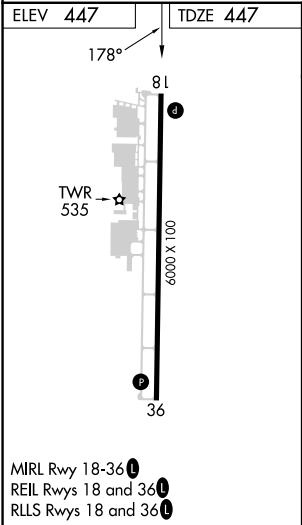


WAAS CH 58301 W18A	APP CRS 178°	Rwy Ldg TDZE 447 Apt Elev 447
--	------------------------	---

RNAV (GPS) RWY 18
MESQUITE METRO (HQZ)

RNP APCH - GPS.		MISSED APPROACH: Climb to 3000 direct IKUSE and on track 117° to YEAGR and hold.
⚠ Rwy 18 helicopter visibility reduction below ¾ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -7°C or above 54°C. Baro-VNAV NA when using DAL altimeter setting. When local altimeter setting not received, use DAL altimeter setting and increase LPV DA to 743 feet and all visibilities 1/8 SM. Increase LNAV/VNAV DA to 878 feet and all visibilities 1/8 SM. Increase all MDAs 60 feet and LNAV visibility Cat C 1/4 SM, and Circling visibility Cat C 1/4 SM.		

AWOS-3 118.175	LONE STAR APP CON 125.2 343.65	MESQUITE TOWER★ 120.3 (CTAF) 0	GND CON 118.85	UNICOM 123.05
--------------------------	--	--	--------------------------	-------------------------

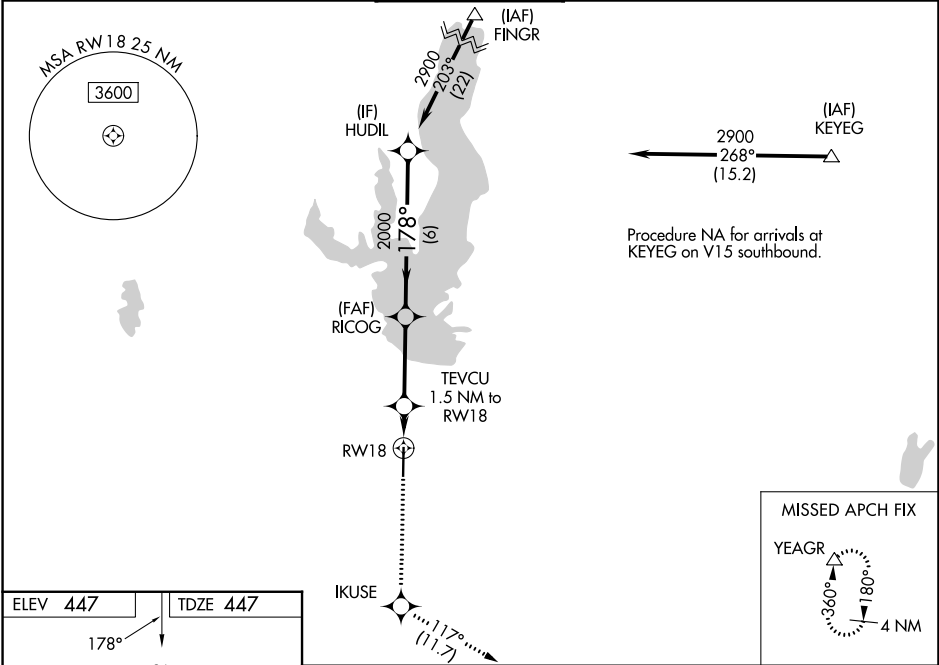

3000	IKUSE	tr 117°	YEAGR	HUDIL
				2900
				2000
				980
				1.5 NM
				3.2 NM
				6 NM
				GP 3.00° TCH 56
CATEGORY	A	B	C	D
LPV DA	697-3/4	250 (300-3/4)		NA
LNAV/VNAV DA	832-1 1/8	385 (400-1 1/8)		NA
LNAV MDA	860-1	413 (500-1)	860-1 1/8 413 (500-1 1/8)	NA
CIRCLING	960-1	513 (600-1)	1160-2 713 (800-2)	NA