

WAAS CH 78401 W36A	APP CRS 358°	Rwy Ldg TDZE 443 Apt Elev 447
--	------------------------	---

RNAV (GPS) RWY 36

MESQUITE METRO (HQQZ)


RNP APCH - GPS.

⚠

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -7°C or above 54°C. Baro-VNAV and VDP NA when using DAL altimeter setting. When local altimeter setting not received, use DAL altimeter setting and increase LPV DA to 739 feet and all visibilities ½ SM. Increase LNAV/VNAV DA to 806 feet and all visibilities ½ SM. Increase all MDAs 60 feet and LNAV visibility Cat C ½ SM, and Circling visibility Cat C ½ SM.

MISSED APPROACH: Climb to 900 then climbing right turn to 3000 direct YEAGR and hold.

AWOS-3 118.175	LONE STAR APP CON 125.2 343.65	MESQUITE TOWER★ 120.3 (CTAF) 1	GND CON 118.85	UNICOM 123.05
--------------------------	--	---	--------------------------	-------------------------

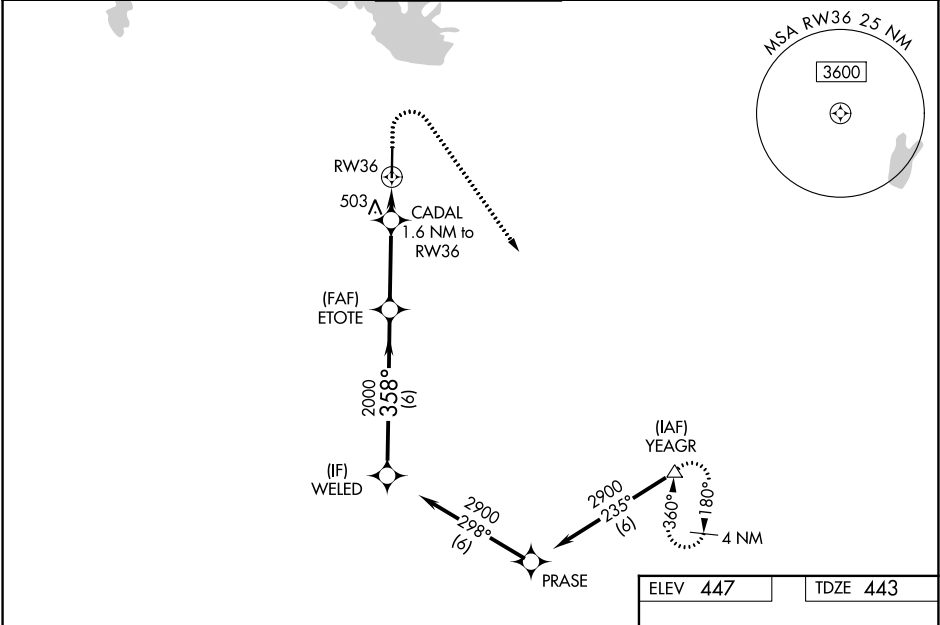

WELED 2900 358° ETOTE 2000 CADAL 1.6 NM to RW36 0.9 NM to RW36 RW36 GP 3.00° TCH 45 6 NM 3.2 NM 0.7 NM 0.9 NM				
CATEGORY	A	B	C	D
LPV DA	693-¾	250 (300-¾)		NA
LNAV/VNAV DA	760-⅞	317 (400-⅞)		NA
LNAV MDA	760-1	317 (400-1)		NA
CIRCLING	960-1	513 (600-1)	1160-2 713 (800-2)	NA

