


RNAV (GPS) RWY 7
INDIANAPOLIS RGNL (MQJ)


T For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C.
A Rwy 7 helicopter visibility reduction below $\frac{3}{4}$ SM NA. Baro-VNAV and VDP NA when using IND altimeter setting. When local altimeter setting not received, use IND altimeter setting and increase LPV DA to 1271 feet and all visibilities $\frac{1}{8}$ SM; increase LNAV/VNAV DA to 1194 feet and all visibilities $\frac{1}{8}$ SM; increase all MDAs 60 feet and LNAV visibility Cat C and D $\frac{1}{4}$ SM.

MISSED APPROACH: Climb to 2700 direct FOGBU and hold.

AWOS-3PT 127.95	INDIANAPOLIS APP CON 127.15 317.8	UNICOM 122.975 (CTAF) 0
---------------------------	---	-----------------------------------

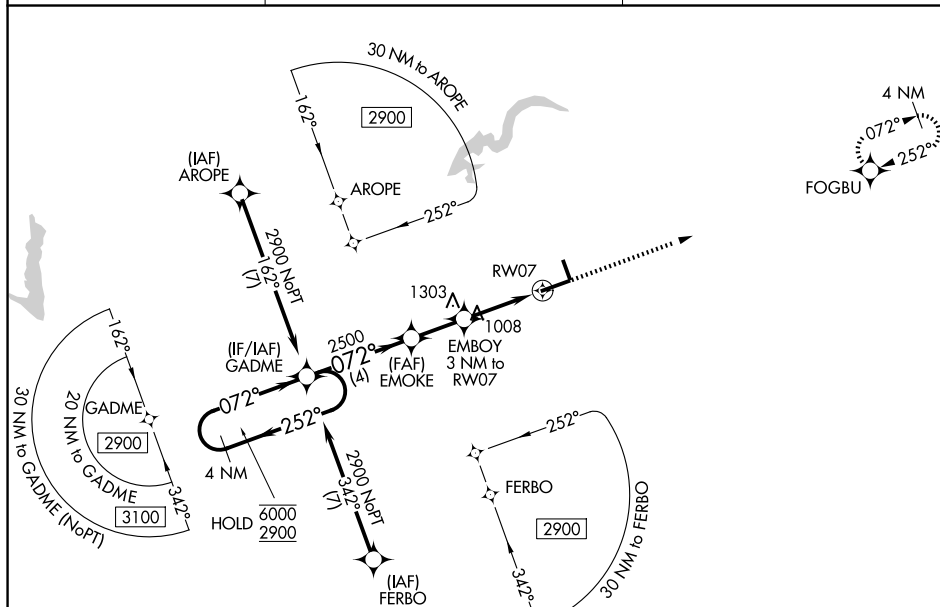

ELEV 862		TDZE 862
----------	--	----------

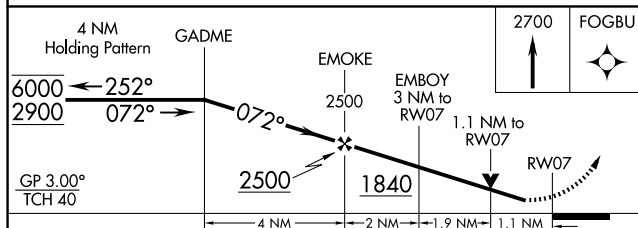

CATEGORY		A	B	C	D
IPV	DA	1216-1 354 (400-1)			
INAV/ VNAV	DA	1139-7/8 277 (300-7/8)			
INAV	MDA	1260-1	398 (400-1)	1260-1 1/8	398 (400-1 1/8)

