

WAAS CH 77516 W35A	APP CRS 355°	Rwy Ldg TDZE 25 Apt Elev 25
--	------------------------	---

RNAV (GPS) RWY 35


TEXAS GULF COAST RGNL (LBX)

RNP APCH - GPS.

⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. When local altimeter setting not received, use HOU altimeter setting: increase LPV DA to 356 feet and all visibilities ¼ SM; increase LNAV/VNAV DA to 509 feet; increase all MDAs 100 feet and LNAV visibility Cat C ¼ SM, LNAV visibility Cat D ½ SM, and Circling visibility Cat D ¼ SM. Baro-VNAV and VDP NA when using HOU altimeter setting. Circling NA east of Rwy 17-35.

MISSED APPROACH:
Climb to 2000 direct PLOIT and right turn via 104° track to DELVE and hold.

ASOS 119.925	HOUSTON APP CON 134.45 284.0	CLNC DEL 125.2	UNICOM 123.0 (CTAF) 0
------------------------	--	--------------------------	---------------------------------

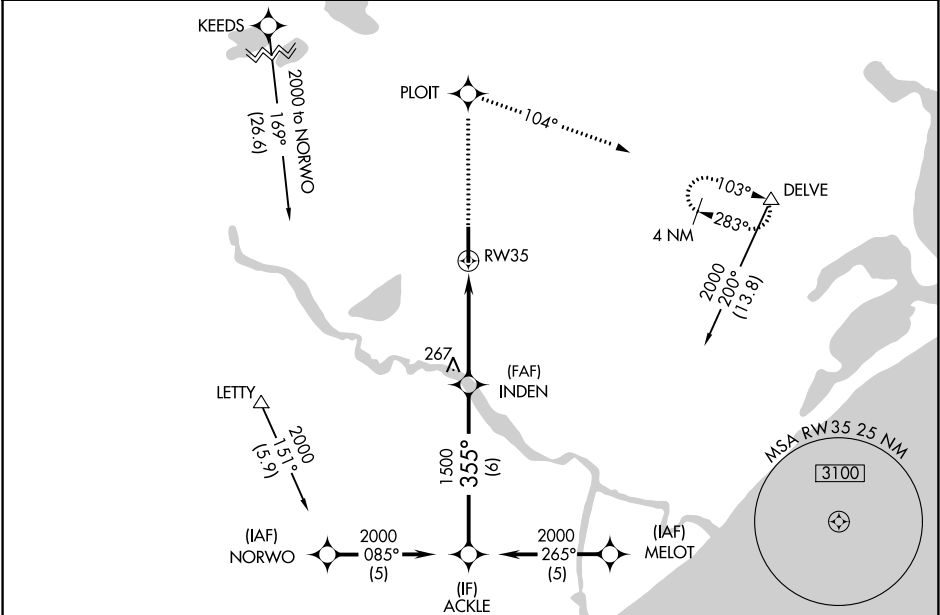

ELEV 25 TDZE 25

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 40).

2000

PLOIT

tr 104°

DELVE

ACKLE

INDEN

1.1 NM to RW35

RW35

Procedure Turn NA

GP 3.00°

TCH 50

6 NM

3.3 NM

1.1 NM

CATEGORY	A	B	C	D
LPV DA	275-¾ 250 (300-¾)			
LNAV/VNAV DA	428-1½ 403 (500-1½)			
LNAV MDA	420-1 395 (400-1)	420-1⅛ 395 (400-1⅛)	420-1¼ 395 (400-1¼)	
CIRCLING	480-1½ 455 (500-1½)	500-1½ 475 (500-1½)	620-2 595 (600-2)	

MIRL Rwy 17-35

35

355°