



WAAS CH 45715 W33A	APP CRS 333°	Rwy Ldg TDZE 485 Apt Elev 488
--	------------------------	---

RNAV (GPS) RWY 33

WASHINGTON RGNL (F'Y'G)

RNP APCH-GPS. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C.	MISSED APPROACH: Climb to 2700 direct EQAXO and hold.
--	---

AWOS-3PT 121.325	ST. LOUIS APP CON 126.5 254.3	UNICOM 122.8 (CTAF) 0
----------------------------	---	---------------------------------

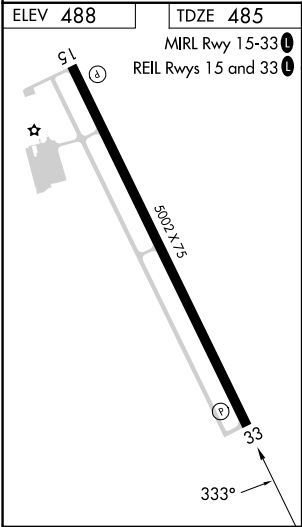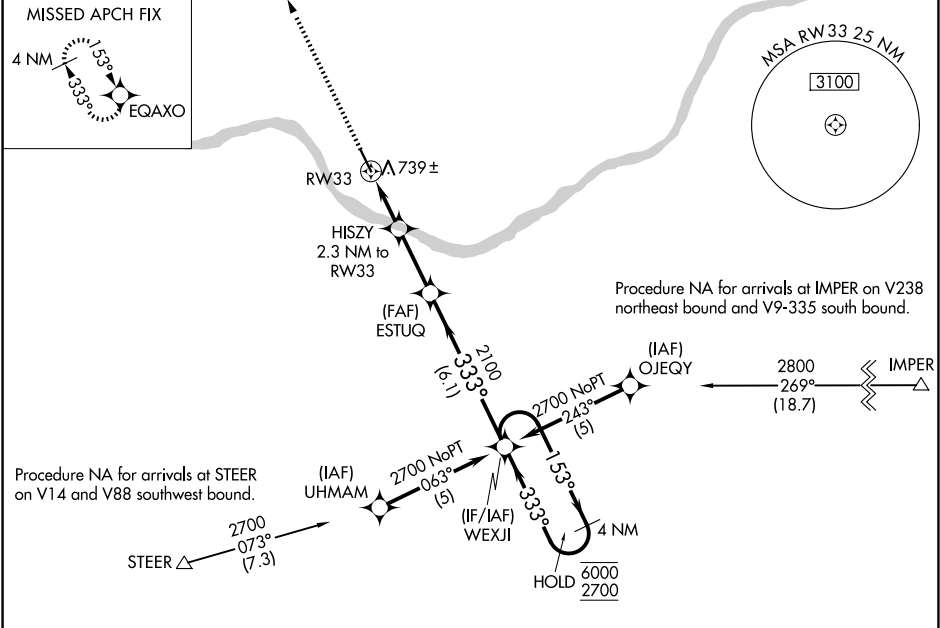

ELEV 488	TDZE 485	MIRL Rwy 15-33 ① REIL Rws 15 and 33 ①			
2700	EQAXO	HISZY 2.3 NM to RW33 1.5 NM to RW33 1260 ESTUQ 2100 WEXJI 4 NM Holding Pattern 153° → 6000 ← 333° 2700 GP 3.00° TCH 43			
1.5 NM	0.8	2.6 NM	6.1 NM		
CATEGORY	A	B	C	D	
LPV DA	823-1 338 (400-1)			NA	
LNAV/VNAV DA	1050-1 5/8 565 (600-1 5/8)			NA	
LNAV MDA	1000-1	515 (600-1)	1000-1 3/8 515 (600-1 3/8)	NA	
CIRCLING	1220-1 732 (800-1)	1260-1 772 (800-1)	1520-3 1032 (1100-3)	NA	