WAAS CH **99719** **W16A**	APP CRS **164°**	Rwy Ldg **6000** TDZE **99** Apt Elev **100**

RNAV (GPS) RWY 16


YOLO COUNTY (DWA)

RNP APCH.

T NA When local altimeter setting not received, use Travis AFB altimeter setting and increase all DA 50 feet and all MDA 60 feet, and increase LNAV/VNAV all Cats and LNAV Cat C and D visibility ¼ mile. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 43°C (109°F). Baro-VNAV NA when using Travis AFB altimeter setting.

MISSED APPROACH: Climb to 3600 direct PROAP and hold, continue climb-in-hold to 3600.

AWOS-3P	TRAVIS APP CON	UNICOM
125.775	**126.6 281.45**	**123.0** (CTAF) L

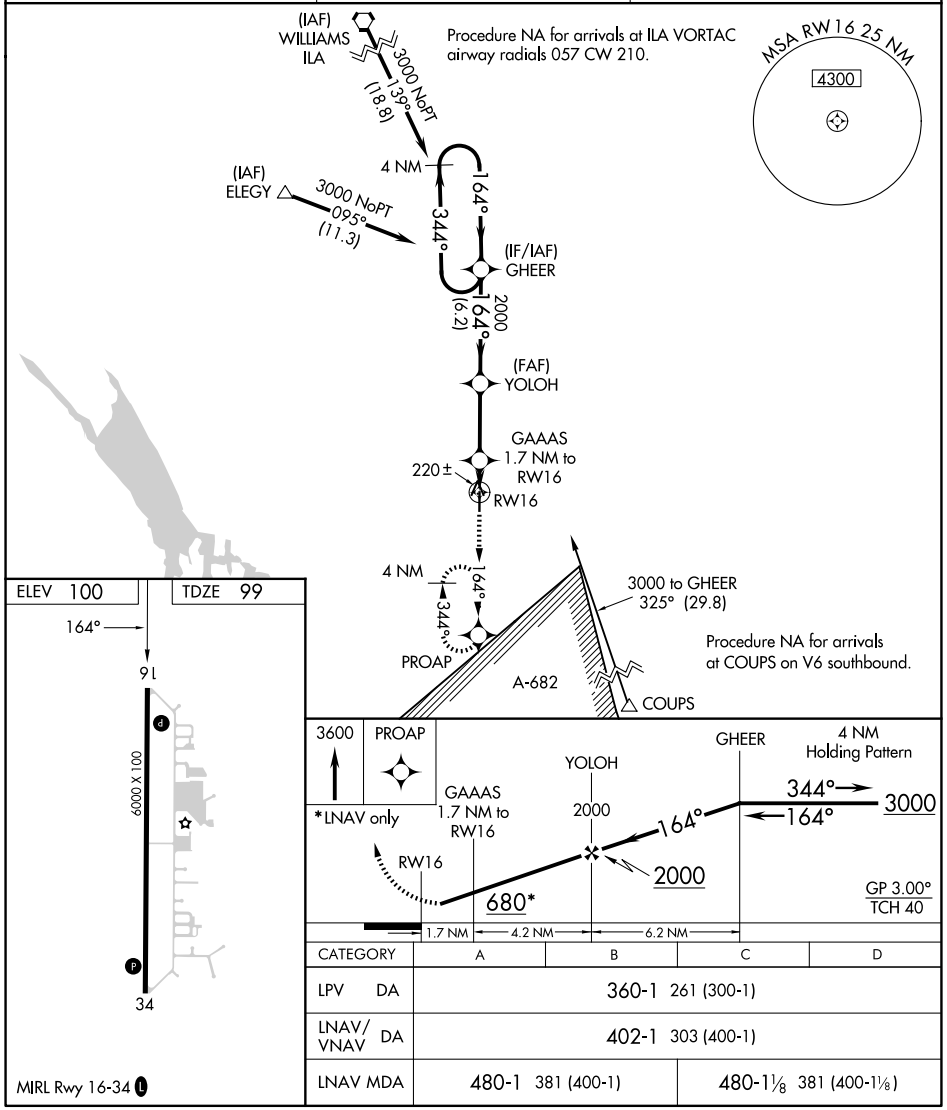

CATEGORY	A	B	C	D
LPV DA	360-1 261 (300-1)			
LNAV/VNAV DA	402-1 303 (400-1)			
LNAV MDA	480-1 381 (400-1)		480-1⅛ 381 (400-1⅛)	

SW-2, 01 OCT 2026 to 29 OCT 2026
SW-2, 01 OCT 2026 to 29 OCT 2026