

WAAS  
CH **45800**  
**W16A**

APP CRS  
**163°**

Rwy Idg  
TDZE **1202**  
Apt Elev **1204**

**RNAV (GPS) RWY 16**

PLATTSMOUTH MUNI/DOUGLAS V DUEY FLD (PMV)

⚠



When local altimeter setting not received, use Offutt AFB altimeter setting, increase all DAs 45 feet and all MDAs 60 feet, increase LNAV/VNAV all Cats visibility ¼mile. VDP NA when using Offutt AFB altimeter setting. Baro-VNAV NA when using Offutt AFB altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 54°C (130°F). DME/DME RNP-0.3 NA.

MISSED APPROACH: Climb to 2800 direct AVFAL and hold.

AWOS-3  
**118.975**

OMAHA APP CON  
**135.875 354.05**

UNICOM  
**122.7 (CTAF) 1**

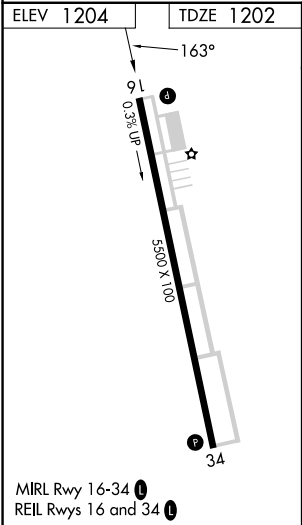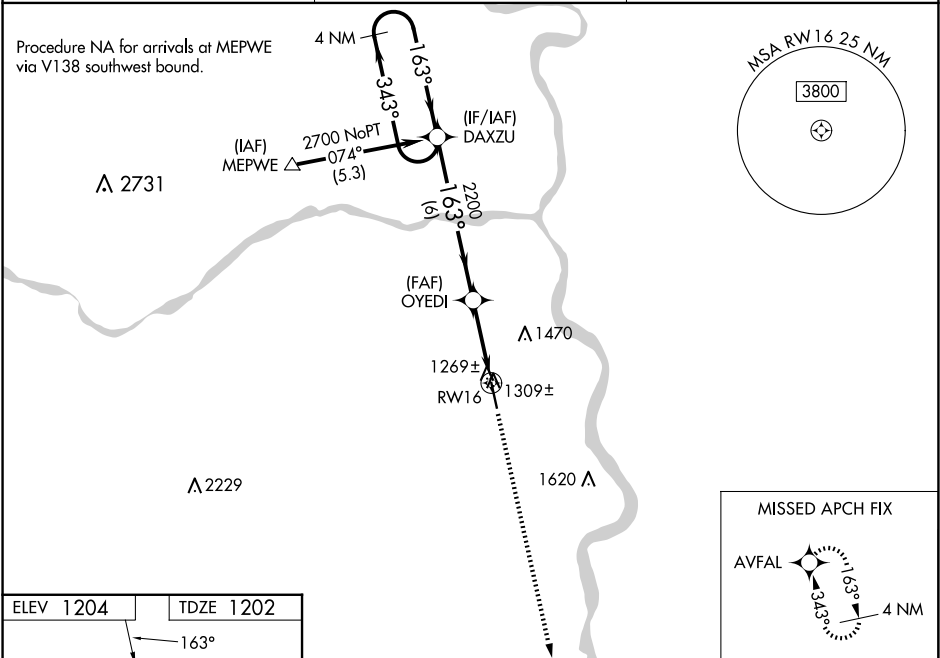

|                             |                        |                        |    |                  |       |
|-----------------------------|------------------------|------------------------|----|------------------|-------|
| 4 NM Holding Pattern        |                        |                        |    | 2800             | AVFAL |
| DAXZU                       |                        |                        |    | * LNAV only.     |       |
| 2700 ← 343° → 163° → 163° → |                        |                        |    | * 1 NM to RWY 16 |       |
| GP 3.00° TCH 39             |                        |                        |    | RWY 16           |       |
|                             |                        |                        |    | 6 NM             | 2 NM  |
|                             |                        |                        |    | 1 NM             |       |
| CATEGORY                    | A                      | B                      | C  | D                |       |
| LPV DA                      | 1 452-1                | 250 (300-1)            | NA |                  |       |
| LNAV/VNAV DA                | 1 539-1¼               | 337 (400-1¼)           | NA |                  |       |
| LNAV MDA                    | 1 560-1                | 358 (400-1)            | NA |                  |       |
| CIRCLING                    | 1 640-1<br>436 (500-1) | 1 660-1<br>456 (500-1) | NA |                  |       |