
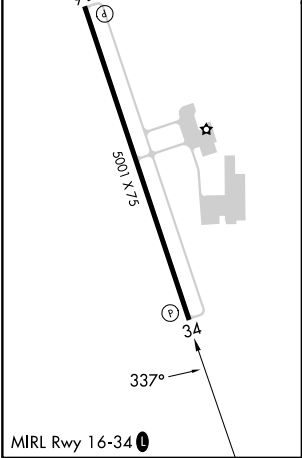


WAAS CH 50139 W34A	APP CRS 337°	Rwy Ldg TDZE 769 Apt Elev 774
--	------------------------	---

RNAV (GPS) RWY 34

CASTROVILLE MUNI (CVB)

RNP APCH - GPS.			MISSED APPROACH: Climb to 1300 then climbing left turn to 3000 direct SHEOL and hold.
▼ ▲ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. Rwy 34 helicopter visibility reduction below ¾ SM NA. Circling Rwy 16 NA at night. When local altimeter setting not received, use SKF altimeter setting: increase LPV DA to 1064 feet; increase LNAV/VNAV DA to 1172 feet; increase all MDAs 60 feet and LNAV visibility Cat C ½ SM and Circling visibility Cat C ¼ SM.			
AWOS-3PT 119.25	SAN ANTONIO APP CON 118.05 353.5	UNICOM 122.8 (CTAF) 0	

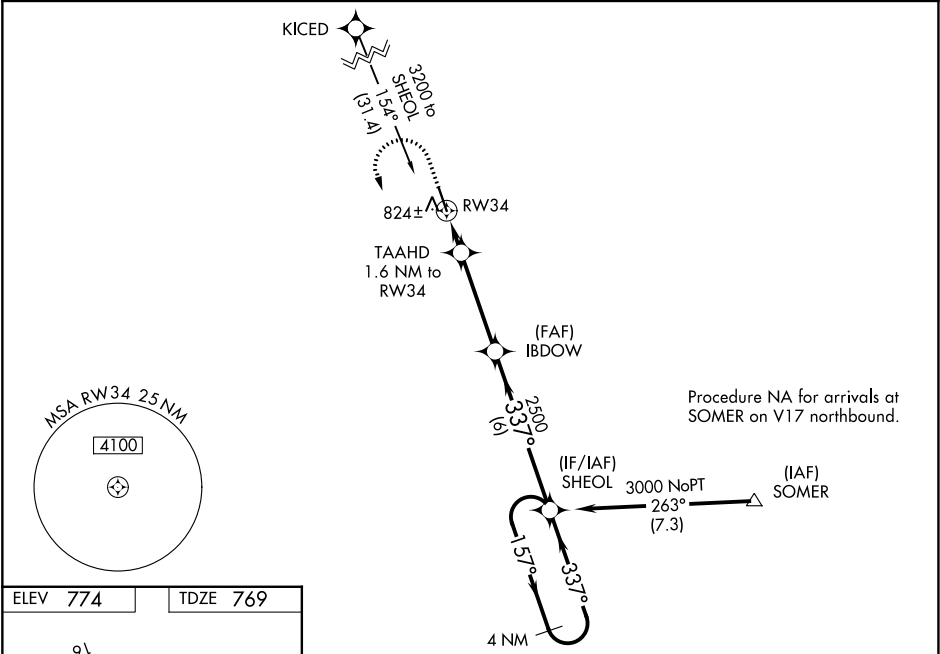

ELEV 774		TDZE 769	
1300		SHEOL	
TAAHD 1.6 NM to RW34		IBDOW 2500	
RW34		SHEOL	
1.6 NM		3.7 NM	
CATEGORY		A	
LPV DA		1019-7/8 250 (300-7/8)	
LNAV/VNAV DA		1127-1¼ 358 (400-1¼)	
LNAV MDA		1200-1 431 (500-1)	
CIRCLING		1200-1 426 (500-1)	