

WAAS CH 40218 W36A	APP CRS 360°	Rwy Ldg 5001 TDZE 1003 Apt Elev 1003
--	------------------------	---

RNAV (GPS) RWY 36
CENTRAL KENTUCKY RGNL (RGA)

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Lexington altimeter setting and increase LPV DA to 1331 feet, LNAV/VNAV DA to 1345 feet and all MDA 80 feet; increase LPV all Cats and LNAV/VNAV all Cats visibility ¼ mile; increase LNAV Cats C and D ½ mile and Circling visibility Cat D ¼ mile. Helicopter visibility reduction below ¾ SM NA. VDP and Baro-VNAV NA when using Lexington altimeter setting.





MISSED APPROACH: Climb to 3100 direct QEFFO and hold.

AWOS-3
119.625



LEXINGTON APP CON
120.15 259.3

UNICOM
122.725 (CTAF) 

MISSED APCH FIX

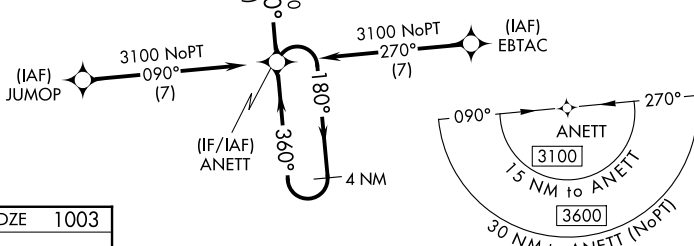

ELEV	1003		TDZE	1003
------	------	--	------	------

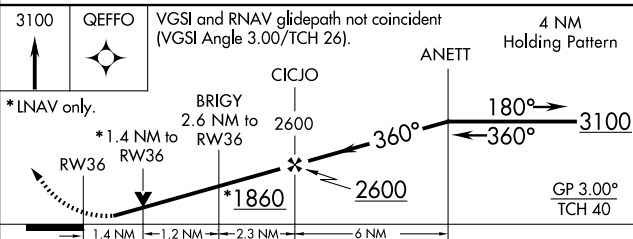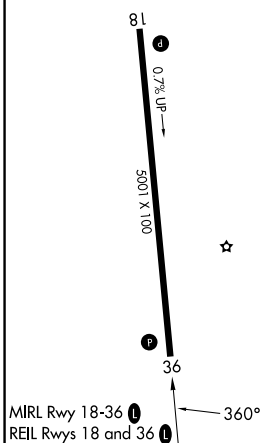

CATEGORY		A	B	C	D
LPV	DA	1264- $\frac{7}{8}$		261 (300- $\frac{7}{8}$)	
LNAV/ VNAV	DA	1278- $\frac{7}{8}$		275 (300- $\frac{7}{8}$)	
LNAV	MDA	1460-1	457 (500-1)	1460-1 $\frac{3}{8}$	457 (500-1 $\frac{3}{8}$)
CIRCLING		1460-1 457 (500-1)	1520-1 517 (600-1)	1520-1 $\frac{1}{2}$ 517 (600-1 $\frac{1}{2}$)	1780-2 $\frac{1}{2}$ 777 (800-2 $\frac{1}{2}$)

RICHMOND, KENTUCKY
Amdt 2B 21JUL16

37°38'N-84°20'W

CENTRAL KENTUCKY RGNL (RGA)
RNAV (GPS) RWY 36