

|                                        |                        |                                                              |
|----------------------------------------|------------------------|--------------------------------------------------------------|
| WAAS<br>CH <b>70319</b><br><b>W24A</b> | APP CRS<br><b>238°</b> | Rwy Ldg <b>12000</b><br>TDZE <b>30</b><br>Apt Elev <b>30</b> |
|----------------------------------------|------------------------|--------------------------------------------------------------|

RNAV (GPS) Y RWY 24

SOUTHWEST FLORIDA INTL (RSW)



RNP APCH - GPS.

▼

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 4°C or above 54°C. Rwy 24 helicopter visibility reduction below ¾ SM NA.

MISSED APPROACH: Climb to 500 then climbing left turn to 2300 direct CORFU and hold, continue climb-in-hold to 2300.

|                         |                                                                           |                                                          |                               |                         |
|-------------------------|---------------------------------------------------------------------------|----------------------------------------------------------|-------------------------------|-------------------------|
| D-ATIS<br><b>124.65</b> | FORT MYERS APP CON★<br><b>125.15 306.2</b> (6)<br><b>126.8 306.2</b> (24) | FORT MYERS TOWER★<br><b>128.75</b> (CTAF) <b>0 257.8</b> | GND CON<br><b>121.9 257.8</b> | UNICOM<br><b>122.95</b> |
|-------------------------|---------------------------------------------------------------------------|----------------------------------------------------------|-------------------------------|-------------------------|

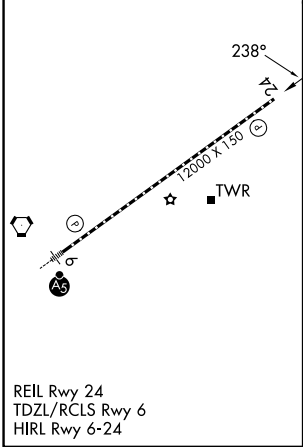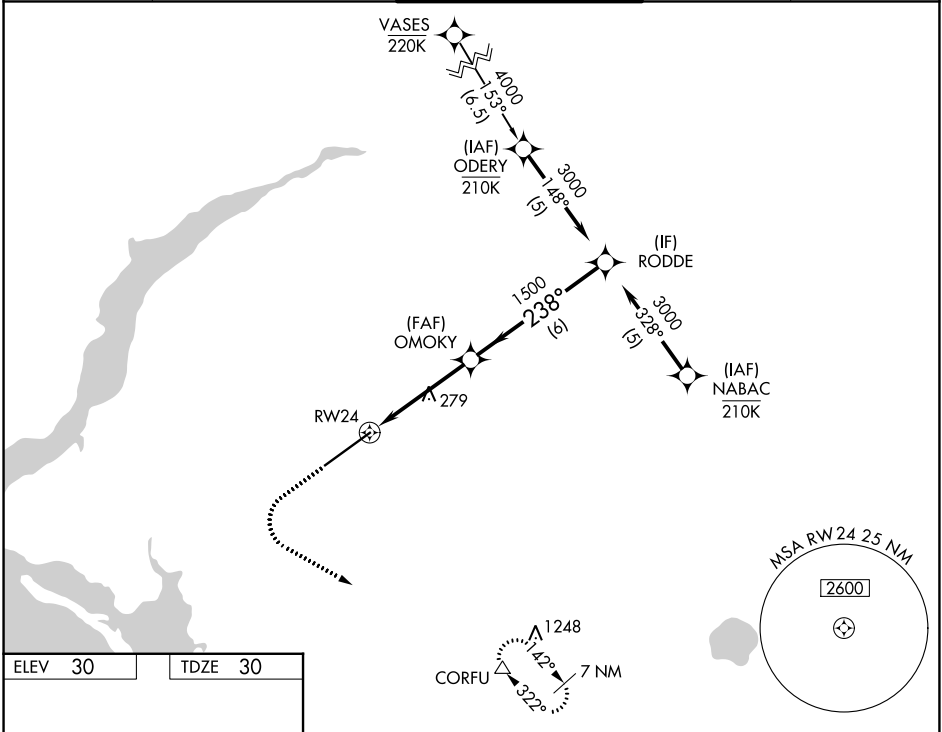

500

↑

2300

↖

CORFU

△

VGSI and RNAV glidepath not coincident  
(VGSI Angle 3.00/TCH 72).

RODDE

OMOKY

1500

238°

3000

GP 3.00°  
TCH 52

1.4 NM to RW24

RW24

1.4 NM

3.1 NM

6 NM

| CATEGORY      |    | A     | B           | C                     | D                    |
|---------------|----|-------|-------------|-----------------------|----------------------|
| LPV           | DA | 280-¾ |             | 250 (300-¾)           |                      |
| LNAV/<br>VNAV | DA | 292-⅞ |             | 262 (300-⅞)           |                      |
| LNAV MDA      |    | 540-1 | 510 (600-1) | 540-1⅜                | 510 (600-1⅜)         |
| CIRCLING      |    | 560-1 | 530 (600-1) | 580-1½<br>550 (600-½) | 660-2<br>630 (700-2) |

SE-3, 01 OCT 2026 to 29 OCT 2026

SE-3, 01 OCT 2026 to 29 OCT 2026