

WAAS CH 97734 W36A	APP CRS 357°	Rwy Ldg 4100 TDZE 1151 Apt Elev 1153
--	------------------------	---

RNAV (GPS) RWY 36

ABILENE MUNI (K78)

RNP APCH - GPS.


▼

NA

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. Baro-VNAV and VDP NA when using SLN altimeter setting. When local altimeter setting not received, use SLN altimeter setting: increase LPV DA to 1468 feet; increase LNAV/VNAV DA to 1667 feet; increase all MDAs 80 feet and LNAV visibility Cat C ¼ SM, and Circling visibility Cat C ¼ SM.

MISSED APPROACH: Climb to 3400 direct FINEB and hold.

AWOS-3P 124.125	MARSHALL AAF GCA* 121.25 269.05	UNICOM 122.8 (CTAF)
---------------------------	---	-------------------------------

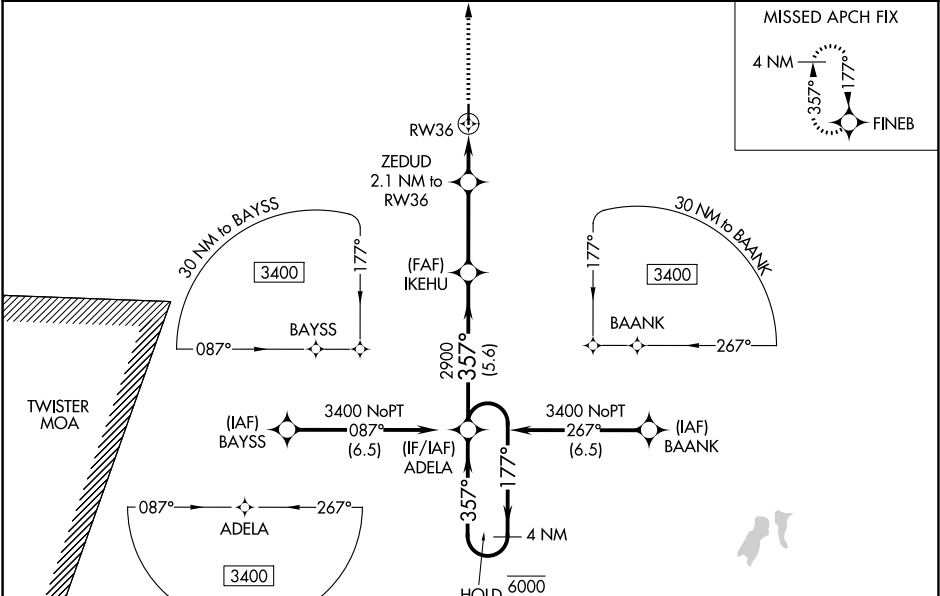

ELEV 1153		D		TDZE 1151	
REIL Rwy 18 and 36		MIRL Rwy 18-36			
4 NM Holding Pattern		ADELA		IKEHU	
6000 3400		2900		2900	
GP 3.00° TCH 40		1860		1860	
5.6 NM		3.3 NM		0.9	
CATEGORY		A		B	
LPV DA		1401-1		250 (300-1)	
LNAV/ VNAV DA		1600-1 3/8		449 (500-1 3/8)	
LNAV MDA		1600-1		449 (500-1)	
CIRCLING		1680-1		527 (600-1)	