

APP CRS
051°

Rwly Idg
TDZE
Apt Elev

2500
1209
1209

RNAV (GPS) RWY 4
SEAMANS FLD (9N3)

▼


▲ NA

DME/DME RNP-0.3 NA.
Obtain local altimeter setting on CTAF; when not received,
use Wilkes-Barre/Scranton Intl altimeter setting.
VDP NA when using Wilkes-Barre/Scranton Intl altimeter setting.

MISSED APPROACH: Climbing left
turn to 4000 direct LOPEZ and hold.

WILKES-BARRE APP CON
120.95 256.7

UNICOM
122.7 (CTAF) 0

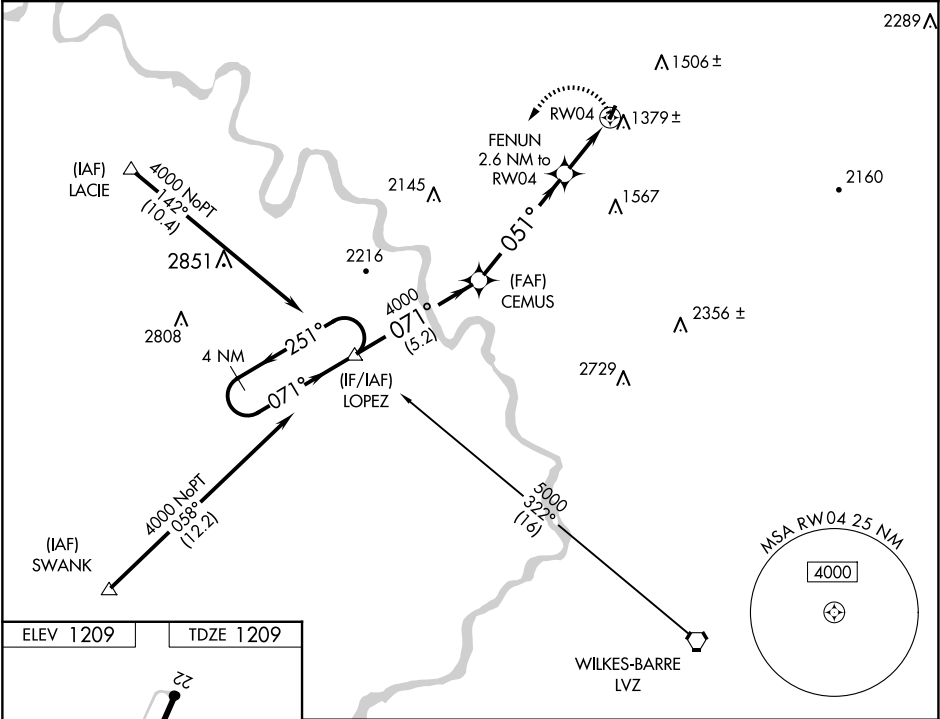

ELEV 1209

TDZE 1209

22

2500x50

051°

LRL Rwy 4-22 0

4 NM Holding Pattern				LOPEZ				CEMUS				4000				LOPEZ △			
4000				←251° 071°→				071°				4000				* 051°			
												FENUN 2.6 NM to RW04				1.1 NM to RW04			
								3.49° TCH 40				2180				RW04			
				←5.2 NM				←4.9 NM				←1.5 NM				←1.1			
CATEGORY				A				B				C				D			
LNAV MDA				1640-1				431 (500-1)				NA							
CIRCLING				1720-1 511 (600-1)				1780-1 571 (600-1)				NA							
WILKES-BARRE/SCRANTON INTL ALTIMETER SETTING MINIMUMS																			
LNAV MDA				1720-1				511 (600-1)				NA							
CIRCLING				1800-1 591 (600-1)				1860-1 651 (700-1)				NA							