

WAAS
CH **82541**
W16B

APP CRS
166°

Rwy Ldg
TDZE **723**
Apt Elev **723**

RNAV (GPS) RWY 16L

PEROT FLD/FORT WORTH ALLIANCE (AFW)

⚠

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -8°C (18°F) or above 54°C (130°F). Circling NA east of Rwy 16L-34R. DME/DME RNP-0.3 NA. For inop ALS, increase LPV Cat E visibility to RVR 4000, LNAV/VNAV all Cats visibility to RVR 4500 and LNAV Cat E visibility to RVR 6000.

ALSF-2


ⓘ

ⓘ

ⓘ

MISSED APPROACH: Climb to 1200 then climbing right turn to 3000 direct OBLON and hold.

ATIS 126.925	LONE STAR APP CON 118.1 306.95	ALLIANCE TOWER 135.15 257.9	GND CON 132.65 306.2
------------------------	--	---------------------------------------	--------------------------------

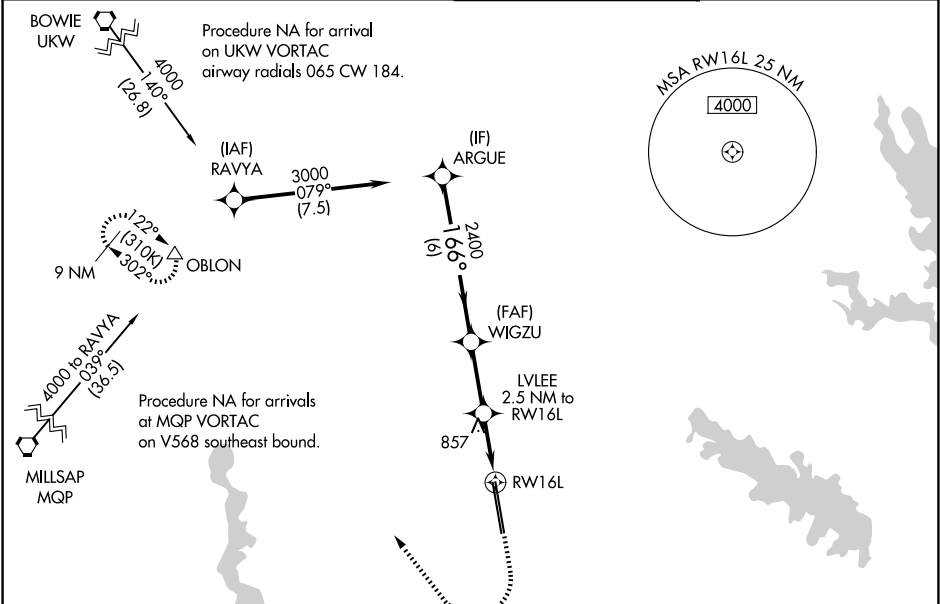

ELEV 723

D

TDZE 723

166°

791

0.5% DOWN - 11000 X 150 - 0.7% UP

0.4% DOWN - 11725 X 150 - 0.7% UP

34L

34R

TWR

ARGUE

3000

166°

WIGZU

2400

LVLEE

2.5 NM to RW16L

*1.1 NM to RW16L

RW16L

*1560

GP 3.00°

TCH 55

6 NM

2.6 NM

1.4 NM

1.1 NM

*LNAV only.

CATEGORY	A	B	C	D	E
LPV DA			923/18	200 (200-½)	
LNAV/VNAV DA			1016/24	293 (300-½)	
LNAV MDA	1120/24	397 (400-½)	1120/35	397 (400-¾)	
CIRCLING	1160-1 437 (500-1)	1320-1 597 (600-1)	1360-1¾ 637 (700-1¾)	1380-2 657 (700-2)	1380-2¼ 657 (700-2¼)

TDZ/CL Rwy 16L and 34R
HIRL Rwy 16L-34R and 16R-34L
REIL Rwy 16R and 34L