


WAAS CH 53619 W28A	APP CRS 284°	Rwy Ldg TDZE 881 Apt Elev 881	4000 881 881
--	------------------------	---	---

RNAV (GPS) RWY 28

FULTON COUNTY (NY)

RNP APCH - GPS.	MISSED APPROACH: Climb to 5000 direct ASQEV and hold, continue climb-in-hold to 5000.
Rwy 28 helicopter visibility reduction below ¾ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C.	

AWOS-3 119.225	ALBANY APP CON 118.05	UNICOM 122.7 (CTAF) 0
--------------------------	---------------------------------	---------------------------------

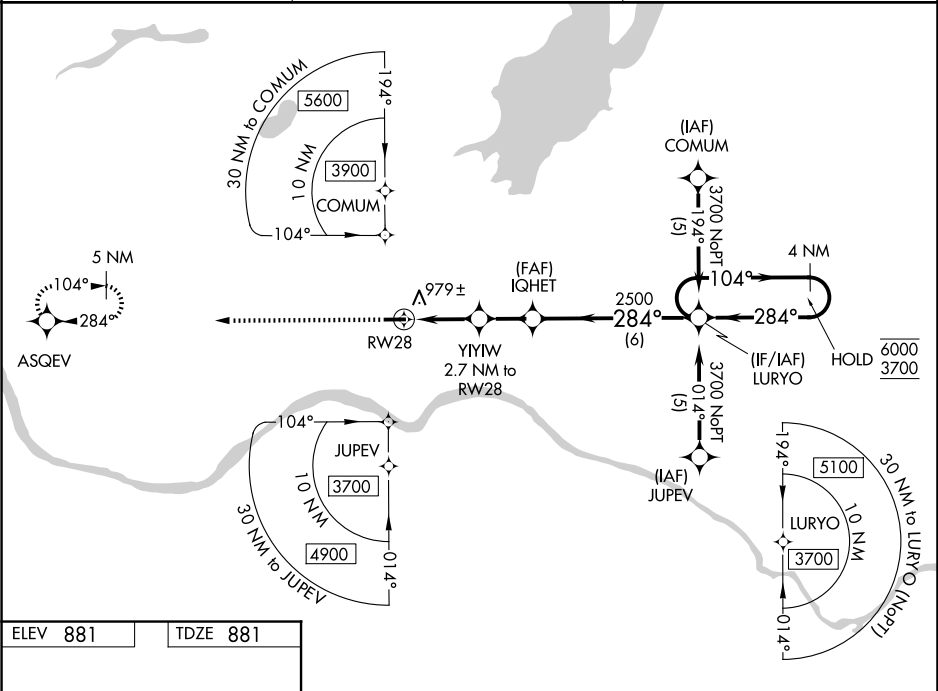

ELEV 881	TDZE 881
5000 ASQEV	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 40).
10 0.4% UP 82 284°	1 NM 1.7 NM 1.9 NM 6 NM
MIRL Rwy 10-28 0	CATEGORY A B C D
REIL Rws 10 and 28 0	LPV DA 1131-¾ 250 (300-¾) NA
	LNAV/VNAV DA 1141-¾ 260 (300-¾) NA
	LNAV MDA 1240-1 359 (400-1) NA
	CIRCLING 1280-1 1340-1 NA