



|                                        |                        |                                                 |             |
|----------------------------------------|------------------------|-------------------------------------------------|-------------|
| WAAS<br>CH <b>45940</b><br><b>W35A</b> | APP CRS<br><b>349°</b> | Rwy Ldg<br>TDZE <b>14</b><br>Apt Elev <b>14</b> | <b>5003</b> |
|----------------------------------------|------------------------|-------------------------------------------------|-------------|

RNAV (GPS) RWY 35  
LOUISIANA RGNL (REG)

**⚠** For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). DME/DME RNP-0.3 NA.

MISSED APPROACH: Climb to 2000 direct AYUYE and hold.

|                            |                          |                                              |                       |                                 |
|----------------------------|--------------------------|----------------------------------------------|-----------------------|---------------------------------|
| AWOS-3PT<br><b>121.175</b> | BTR ASOS<br><b>125.2</b> | BATON ROUGE APP CON★<br><b>133.225 278.3</b> | GCO<br><b>135.075</b> | UNICOM<br><b>123.0 (CTAF) 0</b> |
|----------------------------|--------------------------|----------------------------------------------|-----------------------|---------------------------------|

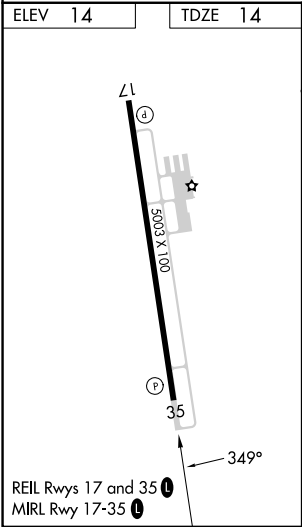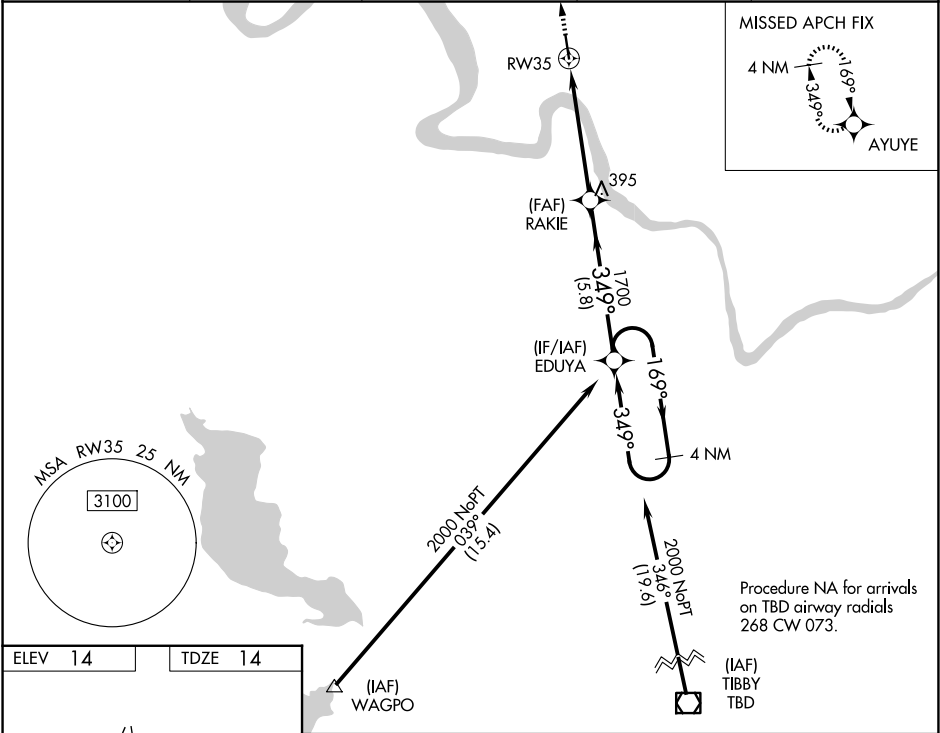

2000

↑

AYUYE

✦

EDUYA

4 NM Holding Pattern

169°

349°

2000

\*LNAV only.

\*1.4 NM to RW35

RAKIE

1700

1700

349°

GP 3.00° TCH 50

RW35

1.4 NM

3.7 NM

5.8 NM

|              |                      |                      |                      |                        |              |
|--------------|----------------------|----------------------|----------------------|------------------------|--------------|
| CATEGORY     | A                    |                      | B                    | C                      | D            |
| LPV DA       |                      |                      | 264-¾                | 250 (300-¾)            |              |
| LNAV/VNAV DA |                      |                      | 417-1⅓               | 403 (500-1⅓)           |              |
| LNAV MDA     | 500-1                | 486 (500-1)          | 500-1⅓               |                        | 486 (500-1⅓) |
| CIRCLING     | 500-1<br>486 (500-1) | 520-1<br>506 (600-1) | 700-2<br>686 (700-2) | 700-2¼<br>686 (700-2¼) |              |

SC-4, 01 OCT 2026 to 29 OCT 2026

SC-4, 01 OCT 2026 to 29 OCT 2026