

WAAS CH 86708 W06A	APP CRS 060°	Rwy Ldg TDZE Apt Elev 5000 657 666
--	------------------------	--


RNAV (GPS) RWY 6

PONTIAC MUNI (PNT)

DME/DME RNP-0.3 NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 54°C (130°F). Baro-VNAV and VDP NA when using Bloomington/Normal altimeter setting. When local altimeter setting not received, use Bloomington/Normal altimeter setting: increase LPV DA to 1138 feet and all visibilities ¼ SM; increase LNAV/VNAV DA to 1339 feet and all visibilities 1 SM; increase all MDAs 100 feet and Circling Cat C visibility ½ SM. Visibility reduction by helicopters NA.

MISSED APPROACH:
Climb to 3000 direct
KEJDO and hold.

AWOS-3 119.675	CHICAGO CENTER 123.75 259.1	UNICOM 123.075 (CTAF) 1
--------------------------	---------------------------------------	-----------------------------------

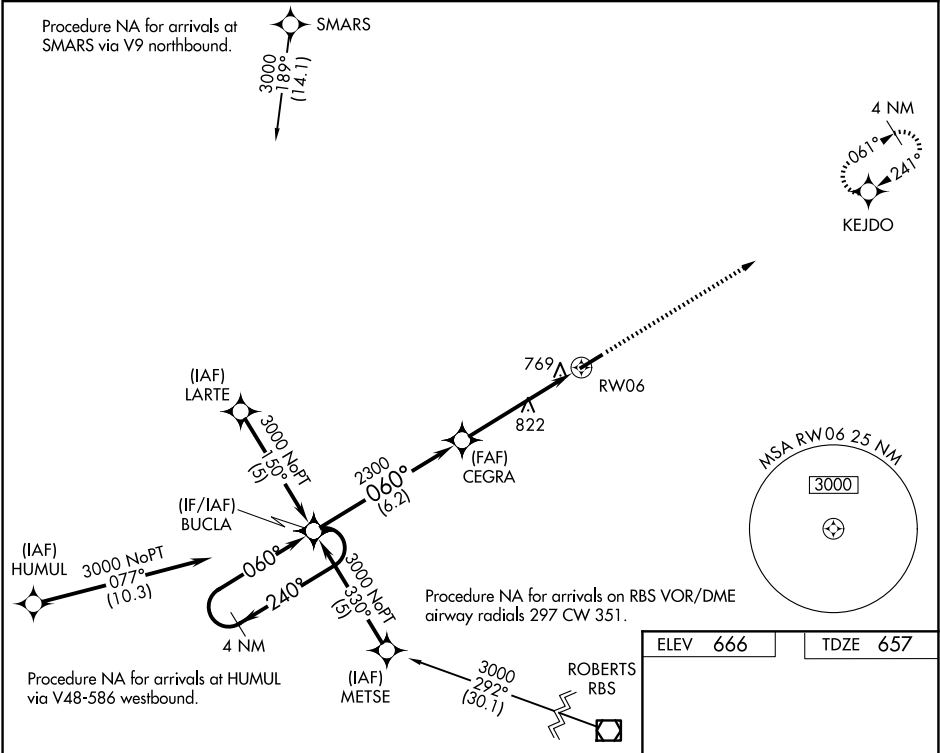

4 NM Holding Pattern		BUCLA		3000		KEJDO	
GP 3.00°		TCH 40		6.2 NM		3.8 NM	
CATEGORY		A		B		C	
LPV DA		1040-1½		383 (400-1½)		NA	
LNAV/VNAV DA		1071-1½		414 (500-1½)		NA	
LNAV MDA		1080-1		423 (500-1)		1080-1¼ 423 (500-1¼)	
CIRCLING		1180-1 514 (600-1)		1200-1 534 (600-1)		1320-1¾ 654 (700-1¾)	
						MIRL Rwy 6-24 1	