

WAAS CH 78044 W23A	APP CRS 228°	Rwy Ldg 5564 TDZE 1576 Apt Elev 1576
--	------------------------	---

APP CR
228°

Rwy Ldg	5564
TDZE	1576
Apt Elev	1576

RNAV (GPS) RWY 23
COOLIDGE MUNI (P08)

COOLIDGE MUNI (P08)

RNP APCH-GPS.


T Circling Rwy 17, 35 NA at night. For uncompensated Baro-VNAV
A systems, LNAV/VNAV NA below -18°C or above 54°C.

MISSED APPROACH: Climb to 2100 then climbing left turn to 3900 direct TOTEC and hold.

AWOS-3PT
119.35


ALBUQUERQUE CENTER
125.4 269.3

UNICOM
123.075 (CTAF) **L**

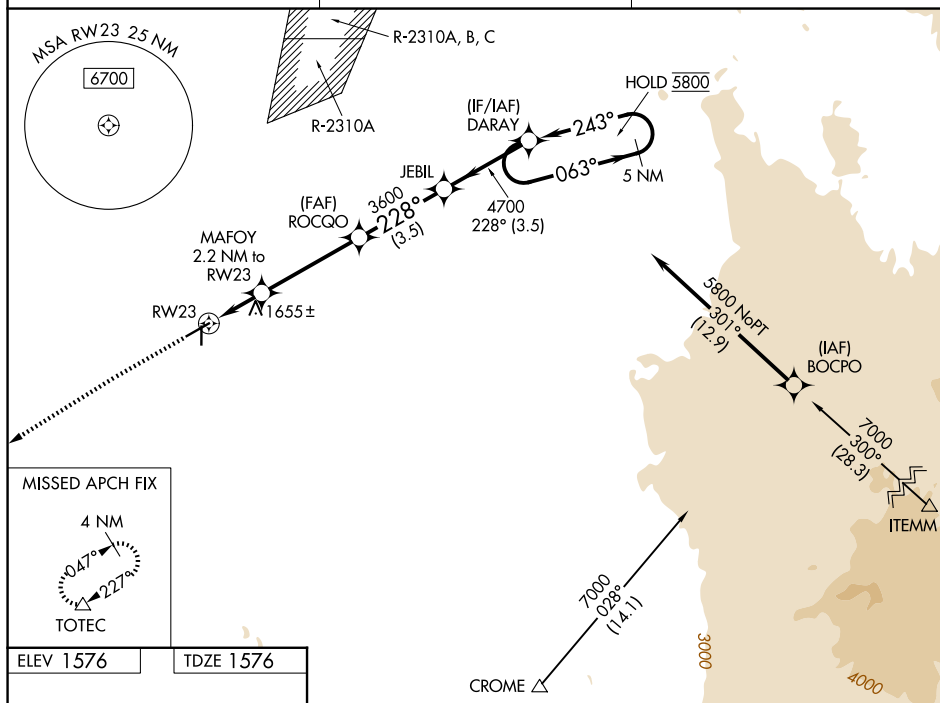

ELEV 1576

TDZE 1576



REIL Rwy 5 and 23

MIRL Rwy 5-23 and 17-35 1

Figure 1 illustrates a flight profile with various waypoints and altitudes. The profile starts at 2100, turns to 3900, and follows a series of waypoints: TOTE, MAFOY (2.2 NM to RW23), RW23 (0.9 NM to RW23), ROCQO (3600), JEBIL, DARAY, and 5 NM Holding Pattern. The profile includes a 228° turn at ROCQO, a 063° turn at DARAY, and a 243° turn at the 5 NM Holding Pattern. The profile is divided into four categories: A, B, C, and D. The profile is also labeled with 2320, 3600, 4700, and 5800. The profile is also labeled with GP 3.00° and TCH 49.