


WAAS CH 56643 W05A	APP CRS 049°	Rwy Ldg TDZE Apt Elev	4700 5377 5377
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 5

OWYHEE (10U)

RNP APCH.	MISSED APPROACH: Climb to 5780 then climbing left turn to 9000 direct HIDET and hold, continue climb-in-hold to 9000. # Missed approach requires minimum climb of 250 feet per NM to 6500.
⚠ Circling Cats C/D NA southeast of Rwy 5-23. ⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -25°C or above 54°C.	

AWOS-3PT 118.525	SALT LAKE CENTER 118.05 363.0	CTAF 122.90
----------------------------	---	-----------------------

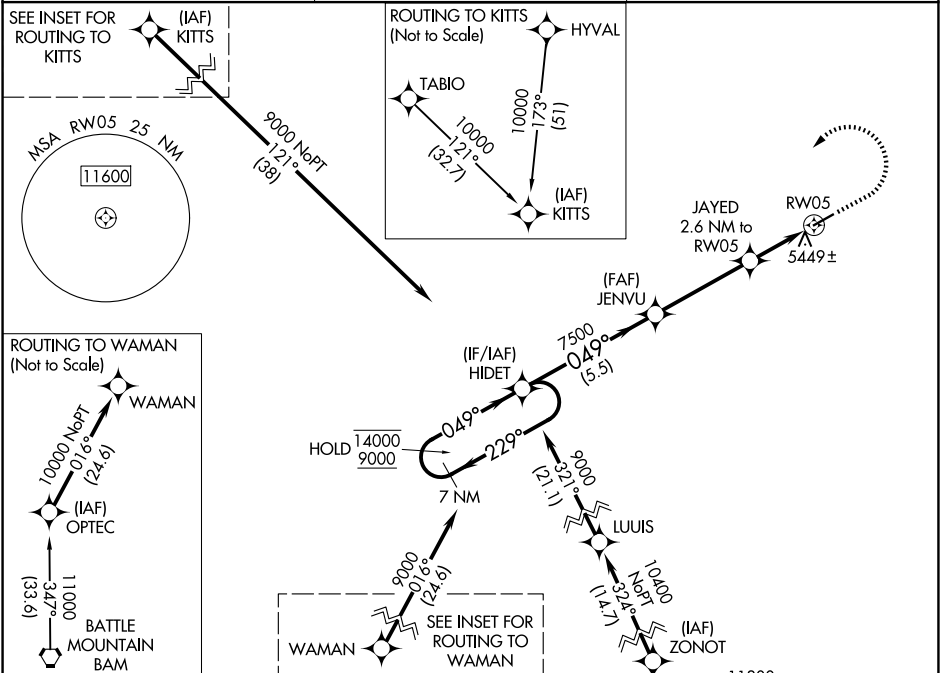

7 NM Holding Pattern		HIDET		JENVU		7500		JAYED 2.6 NM to RW05		5780		9000		HIDET		11300 324° (22.6) DOBYS	
14000 ← 229°		9000 → 049°		049°		7500		*6260		*0.9 NM to RW05		*LNAV only		ELEV 5377		TDZE 5377	
GP 3.00° TCH 44				5.5 NM		3.9 NM		1.7 NM		0.9 NM							
CATEGORY	A	B	C	D													
LPV DA	5577-1 200 (200-1)																
LNAV/VNAV DA#	5627-1 250 (300-1)																
LNAV/VNAV DA	5627-1 250 (300-1)		5909-1½ 532 (600-1½)		5922-1½ 545 (600-1½)												
LNAV MDA	5700-1 323 (400-1)		5700-1 323 (400-1)		5960-1¾ 583 (600-1¾)												
CIRCLING	5760-1 383 (400-1)	5840-1 463 (500-1)	5840-1½ 463 (500-1½)	6860-3 1483 (1500-3)													
MIRL Rwy 5-23 REIL Rws 5 and 23																	