


WAAS CH 45814 W16A	APP CRS 165°	Rwy Ldg TDZE 3086 Apt Elev 3086
--	------------------------	---

RNAV (GPS) RWY 16

RONAN (7SØ)

RNP APCH.	NA Baro-VNAV NA when using Missoula altimeter setting. For uncompensated Baro-VNAV systems, procedure NA below -21°C or above 54°C. Circling NA east of Rwy 16-34. When local altimeter setting not received, use Missoula altimeter setting: increase LPV DA to 3550 and LNAV/VNAV DA to 3639 and all visibilities ¼ SM; increase all MDAs 120 feet and LNAV Cat B and Circling Cats A and B visibility ¼ SM.	MISSED APPROACH: Climb to 13000 direct IBBOR and on track 255° to HANIM and hold, continue climb-in-hold to 13000.
-----------	---	---

AWOS-3 119.925	SALT LAKE CITY CENTER 127.075 244.875	AUNICOM 122.8 (CTAF) Ø
--------------------------	---	----------------------------------

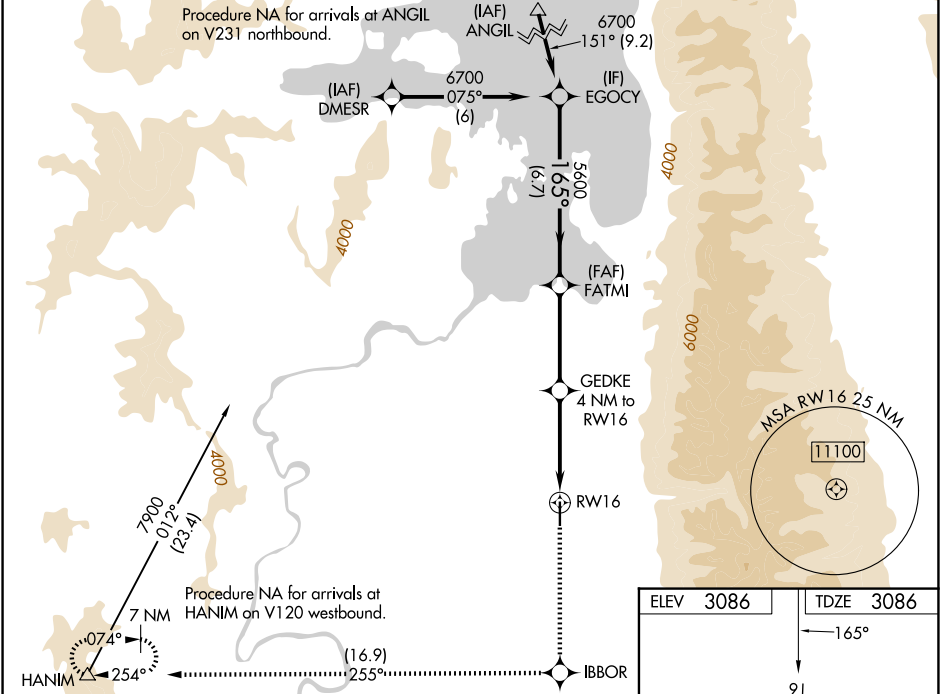

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 21).				
EGOCY		FATMI		HANIM
6700		5600		13000
GP 3.00°		*4400		IBBOR
TCH 40		*LNAV only		tr 255°
6.7 NM		3.8 NM		HANIM
A		B		
LPV	DA	3443-1¼	357 (400-1¼)	NA
LNAV/VNAV	DA	3532-1¾	446 (500-1¾)	NA
LNAV	MDA	3800-1	714 (800-1)	NA
CIRCLING		3800-1	714 (800-1)	NA

