

APP CRS
348°

Rwy Ldg
TDZE
Apt Elev

6004
360
364

RNAV (GPS) RWY 35

MOUNT PLEASANT RGNL (OSA)



▼

▲

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 48°C (118°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Paris altimeter setting and increase all DA/MDA 120 feet, increase LNAV/VNAV visibilities ½ mile all Cats, LNAV visibilities ¼ mile all Cats and circling visibilities ¼ mile all Cats. VDP and Baro-VNAV NA when using Paris altimeter setting.

MISSED APPROACH: Climb to 2000 direct AVORE and hold.

AWOS-3 119.775	FORT WORTH CENTER 132.025 317.75	UNICOM 122.7 (CTAF) 0
--------------------------	--	---------------------------------

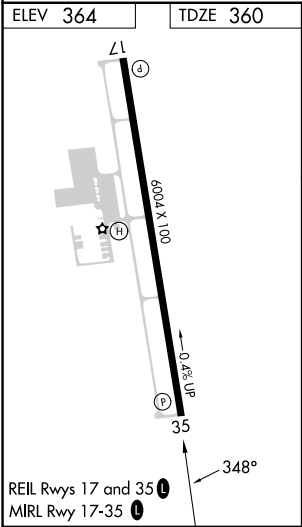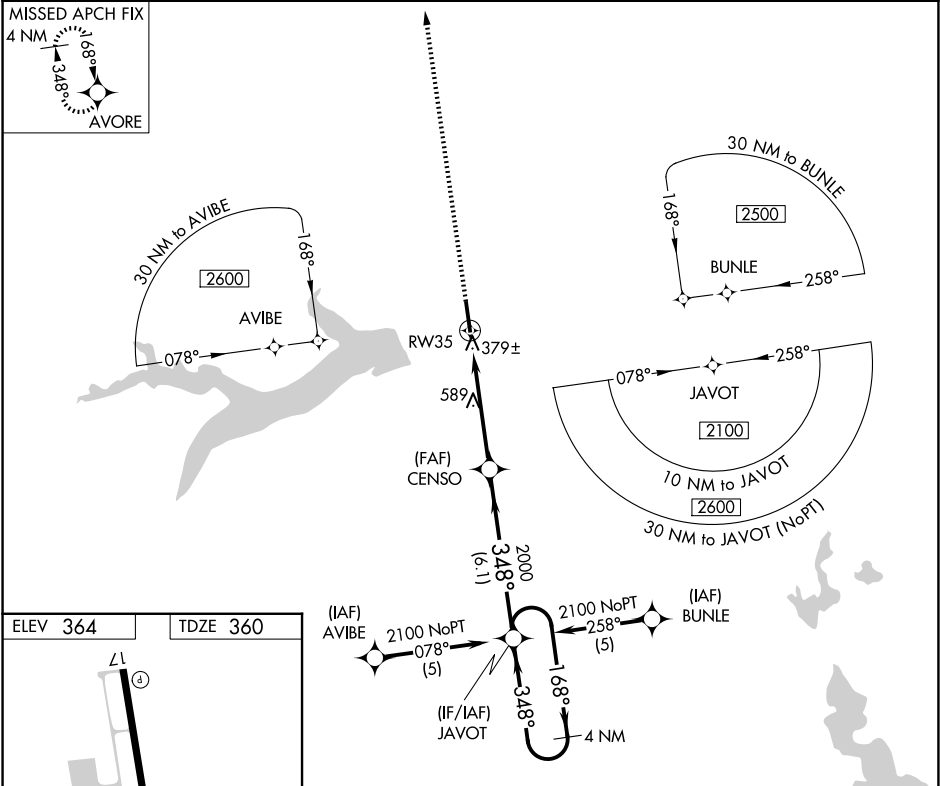

REIL Rwy 17 and 35
MIRL Rwy 17-35

2000 ↑ *LNAV only.	AVORE ✦	4 NM Holding Pattern 2100 168° 348° JAVOT CENSO 2000 348° 3.4 NM 6.1 NM 1.6 RW35 *1.6 NM to RW35 GP 3.00° TCH 44			
CATEGORY	A	B	C	D	
LNAV/DA VNAV	700-1¼		340 (400-1¼)		
LNAV MDA	900-1	540 (600-1)	900-1½ 540 (600-1½)	900-1¾ 540 (600-1¾)	
CIRCLING	900-1	536 (600-1)	1040-2 676 (700-2)	1040-2¼ 676 (700-2¼)	

SC-2, 01 OCT 2026 to 29 OCT 2026

SC-2, 01 OCT 2026 to 29 OCT 2026