

WAAS CH 97504 W36A	APP CRS 355°	Rwy Ldg 6610 TDZE 164 Apt Elev 166
--	------------------------	---

RNAV (GPS) RWY 36

HOUSTON EXEC (TME)

RNP APCH - GPS.

▼



For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C and above 54°C.

▲

Baro-VNAV and VDP NA when using DWH altimeter setting. When local altimeter setting not received, use DWH altimeter setting: increase LPV DA to 471 feet; increase LNAV/VNAV DA to 719 feet; increase all MDAs 60 feet and Circling visibility Cats C/D ¼ SM.

MISSED APPROACH: Climb to 2000 direct AGAXE and via 328° track to BIMTE and hold.

ATIS 119.525	HOUSTON APP CON 123.8 257.7	EXECUTIVE TOWER ★ 126.975 (CTAF) 0	GND CON 132.075	UNICOM 122.975
------------------------	---------------------------------------	---	---------------------------	--------------------------

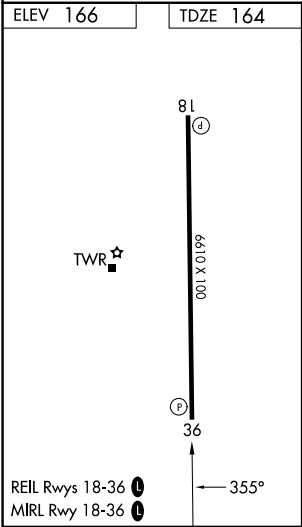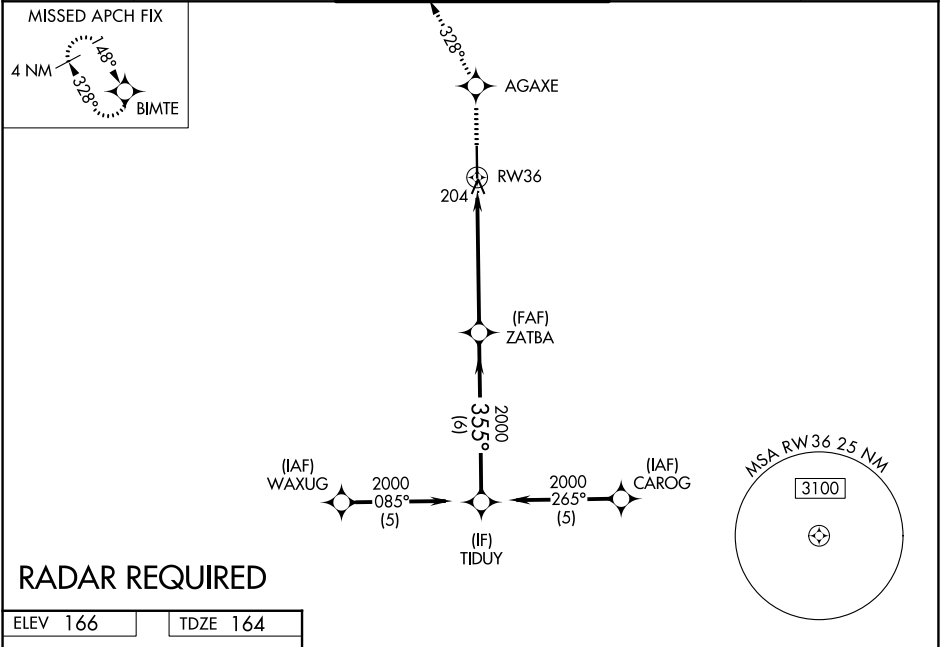

2000 ↑	AGAXE ✧	328° tr	BIMTE ✧	1.3 NM to RW36 355° 2000 ZATBA 355° TIDUY Procedure Turn NA 2000 GP 3.00° TCH 40 1.3 4.3 NM 6 NM			
CATEGORY	A	B	C	D			
LPV DA	414-1 250 (300-1)						
LNAV/VNAV DA	662-1¾ 498 (500-1¾)						
LNAV MDA	620-1	456 (500-1)	620-1⅜ 456 (500-1⅝)	620-1½ 456 (500-1½)			
CIRCLING	820-1	654 (700-1)	860-2 694 (700-2)	1000-2¾ 834 (900-2¾)			