

|                                        |                        |                                                              |
|----------------------------------------|------------------------|--------------------------------------------------------------|
| WAAS<br>CH <b>63017</b><br><b>W16A</b> | APP CRS<br><b>162°</b> | Rwy Ldg <b>10000</b><br>TDZE <b>69</b><br>Apt Elev <b>69</b> |
|----------------------------------------|------------------------|--------------------------------------------------------------|

**RNAV (GPS) RWY 16**  
NORTHWEST FLORIDA BEACHES INTL (ECP)



**⚠** For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Destin altimeter setting and increase all DA 88 feet, increase all MDA 100 feet, and increase LNAV/VNAV all Cats visibility and LNAV Cat C and D visibility 3/8 mile. Baro-VNAV and VDP NA when using Destin altimeter setting. For inop MALSR, increase LNAV Cat C and D visibility to 1 mile. For inop MALSR when using Destin altimeter setting, increase all LPV visibility to 7/8 mile, increase all LNAV/VNAV visibility to 1 3/8 mile, and increase LNAV Cat C and D visibility to 1 3/8 mile.

**MALSR**




**MISSED APPROACH:** Climb to 500 then climbing left turn to 4000 direct SCARE and hold, continue climb-in-hold to 4000.

|                        |                                  |                                              |                          |
|------------------------|----------------------------------|----------------------------------------------|--------------------------|
| ATIS<br><b>119.975</b> | TYNDALL APP CON★<br><b>125.2</b> | PANAMA CITY TOWER★<br><b>118.95 (CTAF) 0</b> | GND CON<br><b>121.65</b> |
|------------------------|----------------------------------|----------------------------------------------|--------------------------|

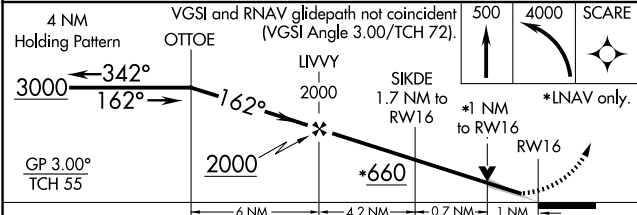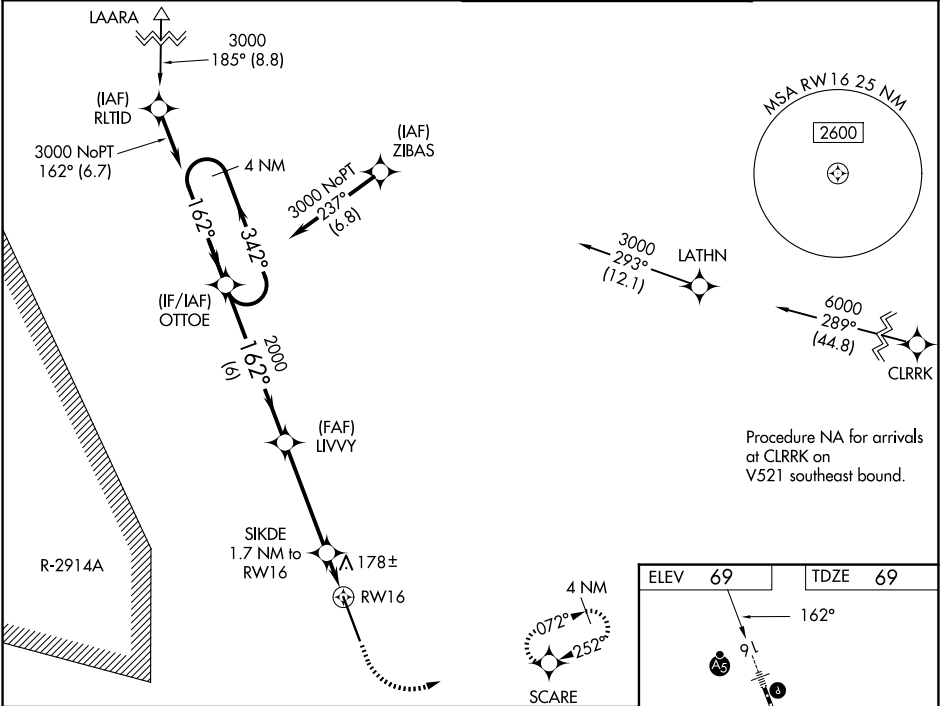

| CATEGORY      | A       | B             | C               | D             |
|---------------|---------|---------------|-----------------|---------------|
| LPV DA        |         | 269-1/2       | 200 (200-1/2)   |               |
| LNAV/ VNAV DA |         | 478-7/8       | 409 (500-7/8)   |               |
| LNAV MDA      | 440-1/2 | 371 (400-1/2) | 440-5/8         | 371 (400-5/8) |
| CIRCLING      | 520-1   | 451 (500-1)   | 520-1 1/2       | 620-2         |
|               |         |               | 451 (500-1 1/2) | 551 (600-2)   |

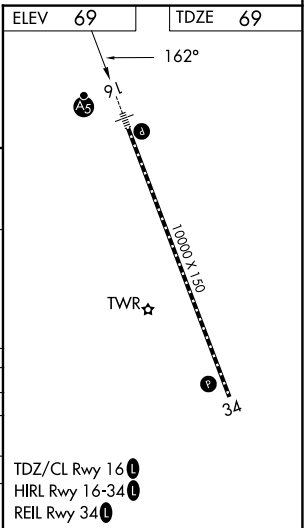

SE-3, 01 OCT 2026 to 29 OCT 2026

SE-3, 01 OCT 2026 to 29 OCT 2026