

WAAS CH 50347 W35A	APP CRS 347°	Rwy Ldg 3500 TDZE 1308 Apt Elev 1309
--	------------------------	---

RNAV (GPS) RWY 35
REDFIELD MUNI(1D8)





RNP APCH - GPS.

A Baro-VNAV and VDP NA when using ABR altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. When local altimeter not received, use ABR altimeter setting and increase LPV DA to 1694 feet and all visibilities ½ SM. Increase LNAV/VNAV DA to 1844 feet and all visibilities ½ SM. Increase all MDAs 100 feet.



MISSED APPROACH: Climb to 3400
direct BOTJO and hold.

AWOS-3P 118.525	MINNEAPOLIS CENTER 126.25 339.8	UNICOM 122.8 (CTAF) 0
---------------------------	---	---------------------------------

MISSED APCH FIX

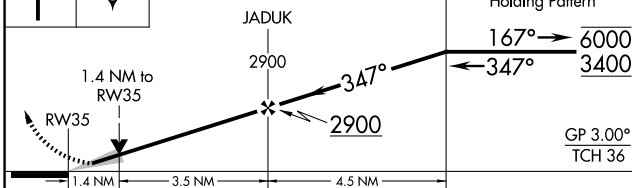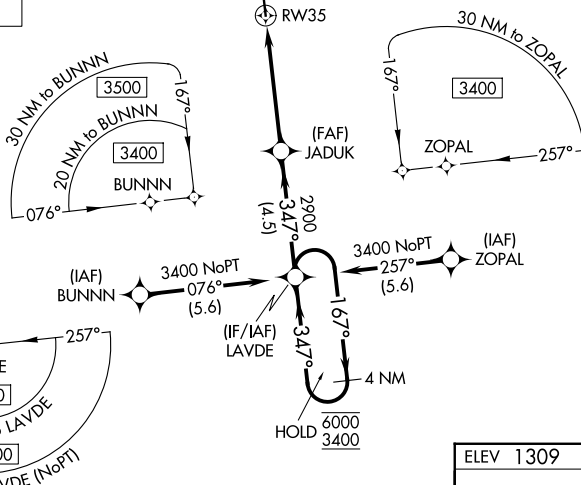

CATEGORY		A	B	C	D
LPV	DA	1558-1	250 (300-1)		NA
RNAV/ VNAV	DA	1760-1 $\frac{3}{8}$	452 (500-1 $\frac{3}{8}$)		NA
RNAV	MDA	1800-1	492 (500-1)		NA
CIRCLING		1820-1 511 (600-1)	1900-1 591 (600-1)		NA

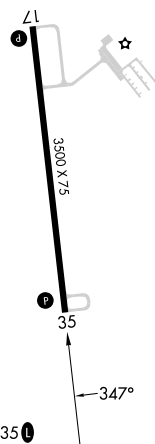MIRL Rwy 17-35 **L**

RNAV (GPS) RWY 35