


WAAS CH 98719 W35A	APP CRS 352°	Rwy Idg 3776 TDZE 861 Apt Elev 861
--	------------------------	---

RNAV (GPS) RWY 35

MARION (C17)

RNP APCH - GPS.	MISSED APPROACH: Climb to 2600 direct HENCH and hold.
Baro-VNAV NA. Circling Rwy 17, NA at night. Circling NA for Cat B west of Rwy 17/35. Use The Eastern Iowa altimeter setting; when not received, use Monticello Rgnl altimeter setting; increase LPV DA to 1133; increase LNAV/VNAV DA to 1162; increase all MDAs 40 feet. For uncompensated Baro-VNAV system, LNAV/VNAV NA below -6°C or above 54°C.	

CID ASOS 124.15	CEDAR RAPIDS APP CON ★ 134.05 266.8	UNICOM 122.7 (CTAF) 0
---------------------------	---	---------------------------------

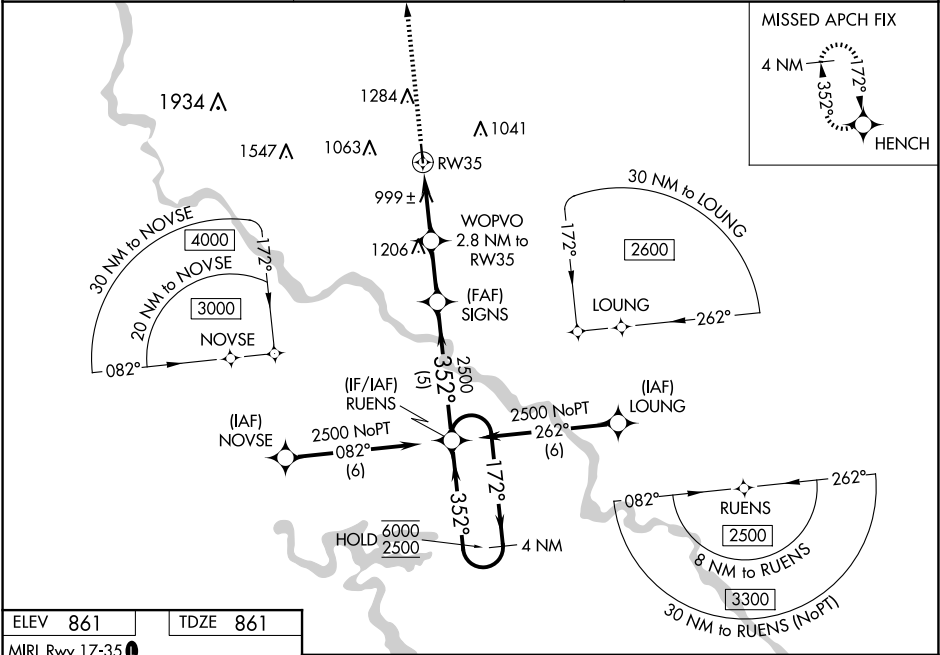

ELEV 861	TDZE 861
MIRL Rwy 17-35 0	

2600

HENCH

WOPVO

2.8 NM to RW35

SIGNS

2500

RUENS

4 NM Holding Pattern

6000

2500

GP 3.00°

TCH 40

RW35

1580

2500

352°

172°

2500

2.8 NM

2.2 NM

5 NM

CATEGORY	A	B	C	D
LPV DA	1111-1	250 (300-1)	NA	
LNAV/VNAV DA	1140-1	279 (300-1)	NA	
LNAV MDA	1280-1	419 (500-1)	NA	
CIRCLING	1280-1 419 (500-1)	1340-1 479 (500-1)	NA	