ILS or LOC RWY 35R

ABILENE RGNL (ABI)


LOC/DME I-ABI	APP CRS	Rwy Ldg	7198
110.3	355°	TDZE	1776
Chan 40		Apt Elev	1791

VDP NA when using DYS altimeter setting. For inop ALS, increase S-ILS 35R Cat E visibility to RVR 4000, and S-LOC 35R Cat C/D/E visibility to 1⅜ SM.
When local altimeter setting not received, use DYS altimeter setting and increase S-ILS 35R DA to 1997 feet; increase all MDAs 40 feet and S-LOC 35R visibility Cat C/D/E ⅛ SM, and Circling visibility Cat D ¼ SM.
*RVR 1800 authorized with use of FD or AP or HUD to DA.
*RVR 1800 NA when using DYS altimeter setting.

MALSR


MISSED APPROACH: Climb to 3300 then climbing left turn to 5000 direct ABI VORTAC and hold, continue climb-in-hold to 5000.


ATIS	ABILENE APP CON	ABILENE TOWER	GND CON
118.25	125.0 338.3 (E) 127.2 282.3 (W)	120.1 257.8	121.7 348.6

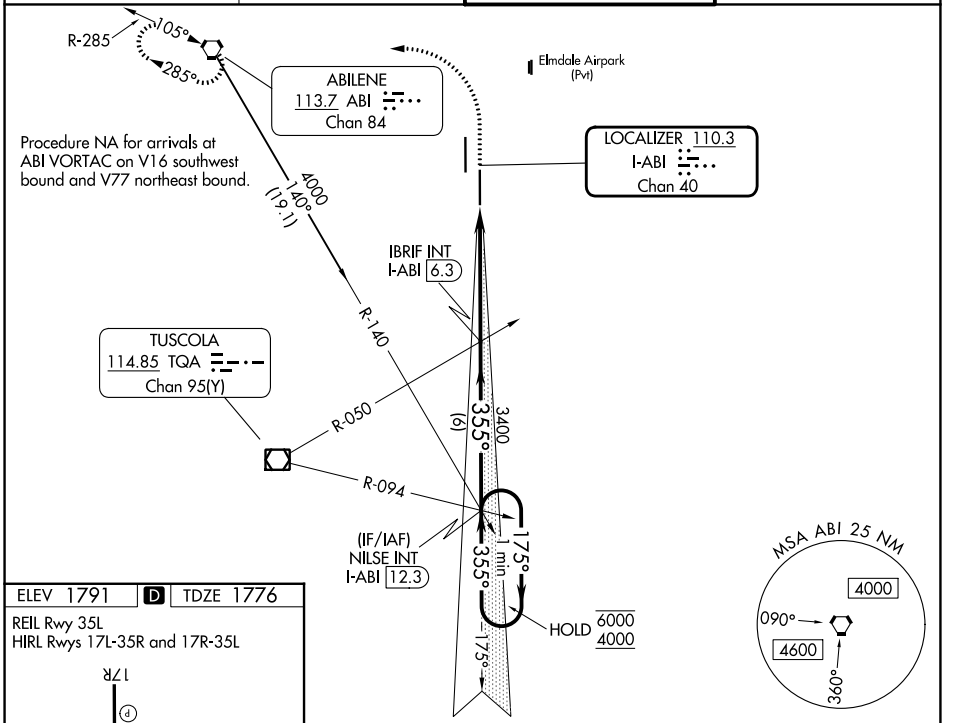

ELEV 1791 D TDZE 1776

REIL Rwy 35L
HIRL Rwys 17L-35R and 17R-35L

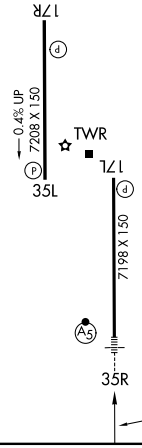

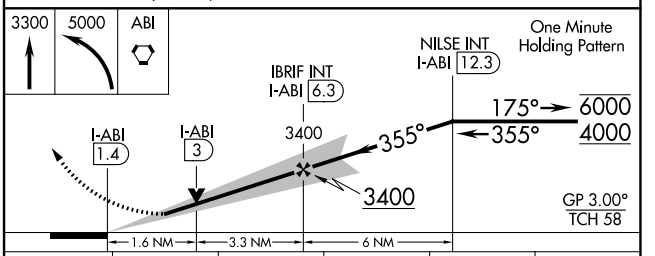

CATEGORY	A	B	C	D	E
S-ILS 35R *	1976/24 200 (200-½)				
S-LOC 35R	2360/24 584 (600-½)		2360-1¼ 584 (600-1¼)		
CIRCLING	2360-1 569 (600-1)		2420-1¾ 629 (700-1¾)	2460-2 669 (700-2)	2620-3 829 (900-3)

SC-2, 29 OCT 2026 to 26 NOV 2026
SC-2, 29 OCT 2026 to 26 NOV 2026