RNAV (GPS) RWY 17L

ABILENE RGNL (ABI)


WAAS CH 50317 W17A	APP CRS 175°	Rwy Ldg 7198 TDZE 1791 Apt Elev 1791


RNP APCH - GPS.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -11°C or above 54°C. Baro-VNAV and VDP NA when using DYS altimeter setting. When local altimeter setting not received, use DYS altimeter setting and increase LPV DA to 2062 feet and all visibilities ⅛ SM; increase LNAV/VNAV DA to 2134 feet; increase all MDAs 40 feet, and Circling visibility Cat D ¼ SM.


MISSED APPROACH: Climb to 4000 direct IBRIF and hold, continue climb-in-hold to 4000.

ATIS	ABILENE APP CON	ABILENE TOWER	GND CON
118.25	125.0 338.3 (E) 127.2 282.3 (W)	120.1 257.8	121.7 348.6

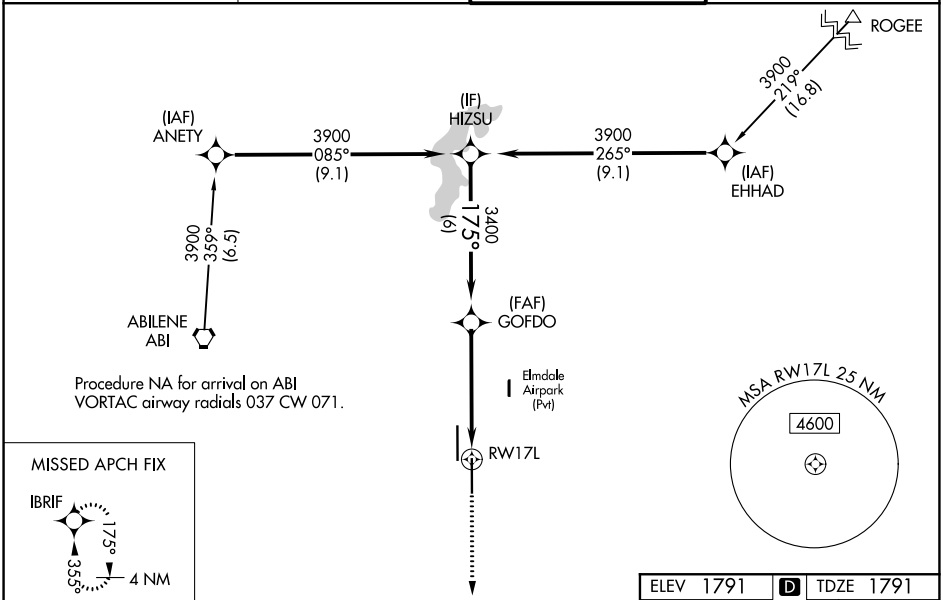

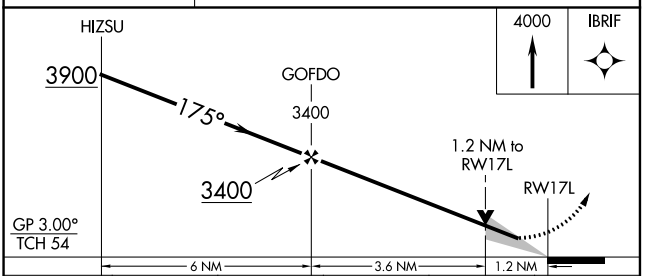

CATEGORY	A	B	C	D	E
LPV DA	2041-¾ 250 (300-¾)				
LNAV/VNAV DA	2113-1 322 (400-1)				
LNAV MDA	2240-1 449 (500-1)		2240-1⅜ 449 (500-1⅜)		
CIRCLING	2240-1 449 (500-1)	2320-1 529 (600-1)	2420-1¾ 629 (700-1¾)	2460-2 669 (700-2)	2620-3 829 (900-3)

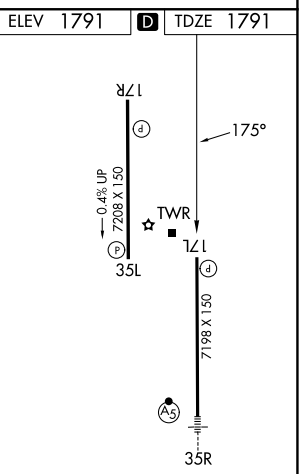

REIL Rwy 35L
HIRL Rwys 17L-35R and 17R-35L

SC-2, 29 OCT 2026 to 26 NOV 2026
SC-2, 29 OCT 2026 to 26 NOV 2026