# RNAV (GPS) RWY 35R

ABILENE RGNL (ABI)

| WAAS CH 97517 W35A | APP CRS 355° | Rwy Ldg 7198 TDZE 1776 Apt Elev 1791 |
|---|---|---|


RNP APCH - GPS.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -11°C or above 53°C. Baro-VNAV and VDP NA when using DYS altimeter setting. For inop ALS, increase LPV Cat E visibility to RVR 4000, LNAV/VNAV all Cats to RVR 6000, and LNAV Cats C/D/E to 1⅜ SM. When local altimeter setting not received, use DYS altimeter setting and increase LPV DA to 1997 feet; increase LNAV/VNAV DA to 2210 feet; increase all MDAs 40 feet and LNAV visibility Cat C/D/E to RVR 5500 and Circling visibility Cat D ¼ SM.
*RVR 1800 authorized with use of FD or AP or HUD to DA.


MALSR


MISSED APPROACH: Climb to 4000 direct GOFDO and hold, continue climb-in-hold to 4000.

| ATIS | ABILENE APP CON | ABILENE TOWER | GND CON |
|---|---|---|---|
| 118.25 | 125.0 338.3 (E) 127.2 282.3 (W) | 120.1 257.8 | 121.7 348.6 |

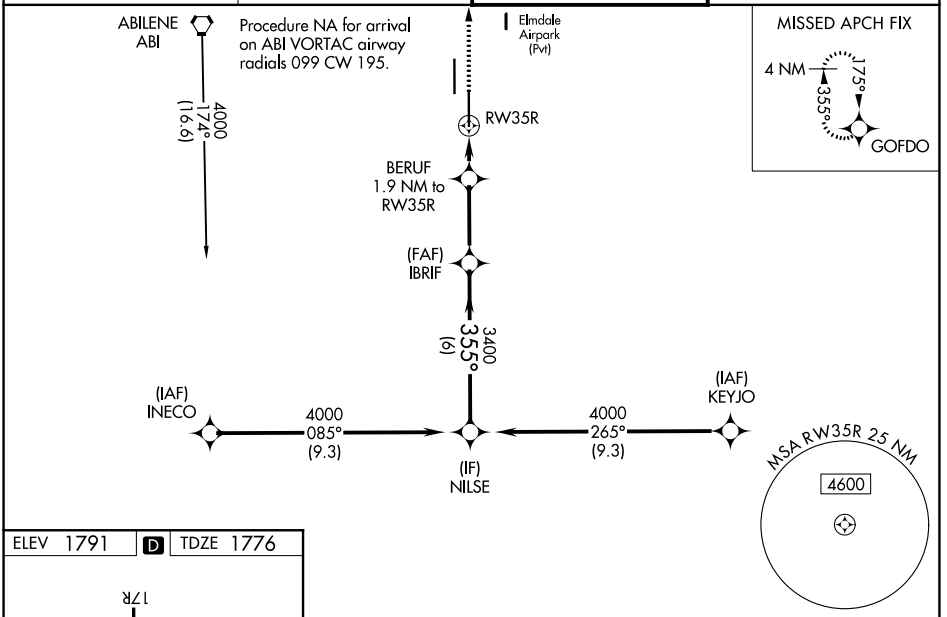


ELEV 1791 D TDZE 1776

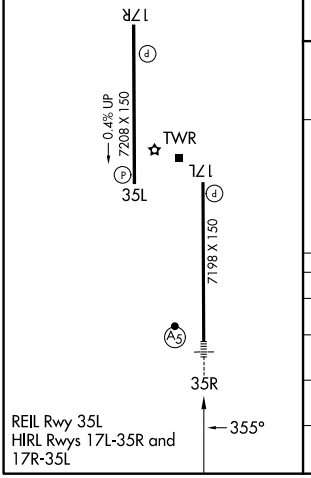

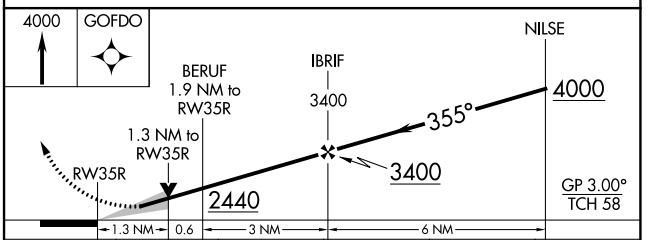
| CATEGORY | A | B | C | D | E |
|---|---|---|---|---|---|
| LPV DA* | 1976/24 200 (200-½) | | | | |
| LNAV/VNAV DA | 2189/40 413 (400-¾) | | | | |
| LNAV MDA | 2240/24 464 (500-½) | | 2240/50 464 (500-1) | | |
| CIRCLING | 2240-1 449 (500-1) | 2320-1 529 (600-1) | 2420-1¾ 629 (700-1¾) | 2460-2 669 (700-2) | 2620-3 829 (900-3) |



SC-2, 29 OCT 2026 to 26 NOV 2026
SC-2, 29 OCT 2026 to 26 NOV 2026