RNAV (GPS) RWY 14

ALEXANDRIA INTL (AEX)

WAAS CH 56417 W14A	APP CRS 141°	Rwy Ldg 9352 TDZE 85 Apt Elev 88


RNP APCH - GPS.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 48°C. For inop ALS, increase LPV all Cats visibility to RVR 4500, LNAV/VNAV all Cats visibility to RVR 6000, and LNAV Cat D visibility to RVR 6000. RADAR required when R-3801 A-B in use.


MALSR

MISSED APPROACH: Climb to 4000 direct EHHIR and on track 106° to MUSHE and hold.


ASOS	MAKS APP CON	ALEXANDRIA TOWER	GND CON
123.975	125.4 254.8	127.35 (CTAF) 269.2	121.9 372.0

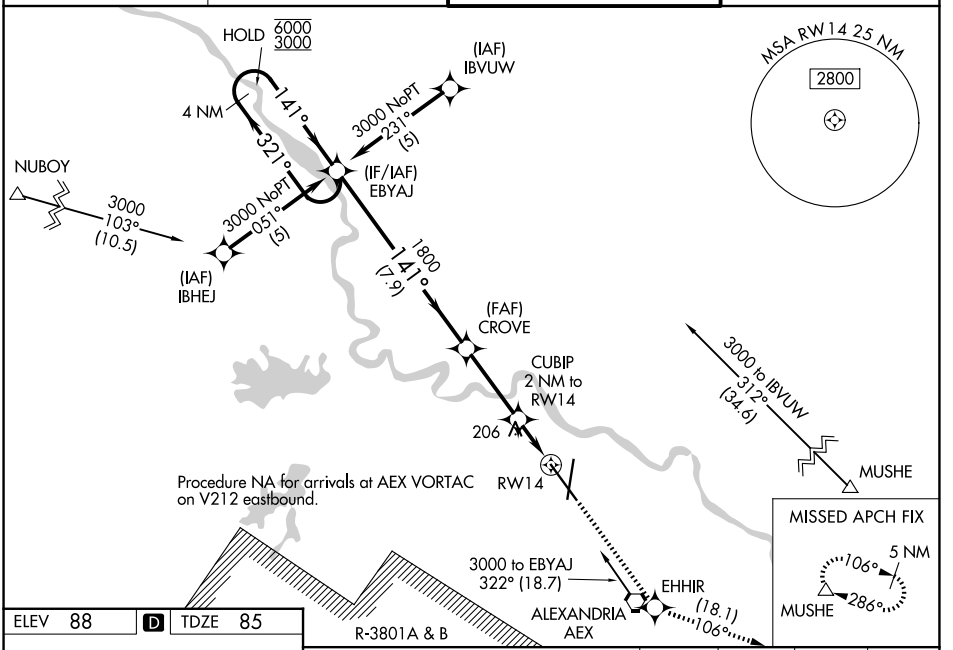

ELEV 88 D TDZ 85

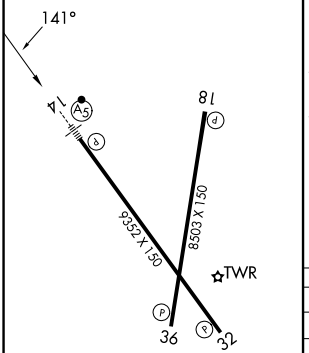

TDZL Rwy 14
REIL Rwys 18, 32 and 36
HIRL Rwys 18-36 and 14-32

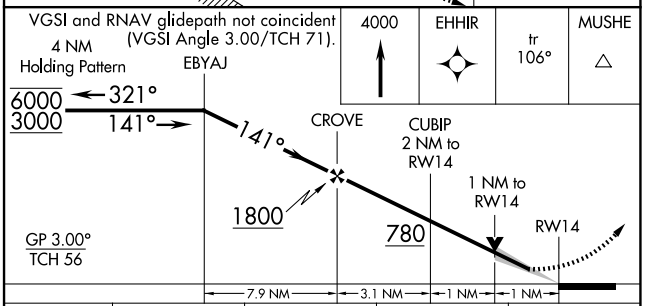

CATEGORY	A	B	C	D
LPV DA	346/24		261 (300-½)	
LNAV/VNAV DA	488/50		403 (400-1)	
LNAV MDA	480/24	395 (400-½)	480/35 395 (400-⅝)	480/50 395 (400-1)
CIRCLING	540-1 452 (500-1)	560-1 472 (500-1)	700-1¾ 612 (700-1¾)	860-2½ 772 (800-2½)

SC-4, 29 OCT 2026 to 26 NOV 2026
SC-4, 29 OCT 2026 to 26 NOV 2026