WAAS	APP CRS	Rwy Ldg	5099
CH 61007	315°	TDZE	1423
W31A		Apt Elev	1425

RNAV (GPS) RWY 31


ALEXANDRIA RGNL/CHANDLER FLD (AXN)

T A Inoperative table does not apply to LPV & LNAV/VNAV Cats A/B/C and LNAV Cat C. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 46°C (114°F). DME/DME RNP -0.3 NA. VDP and Baro-VNAV NA when using Glenwood altimeter setting. When local altimeter setting not received, use Glenwood altimeter setting and increase all DAs/MDAs 40 feet and increase LPV and LNAV/VNAV visibilities ¼ mile all Cats.


ODALS

MISSED APPROACH: Climb to 3500 direct OCIWE and via 352° track to TILER and hold.


ASOS	MINNEAPOLIS CENTER	UNICOM
118.375	126.1 269.2	123.0 (CTAF) L

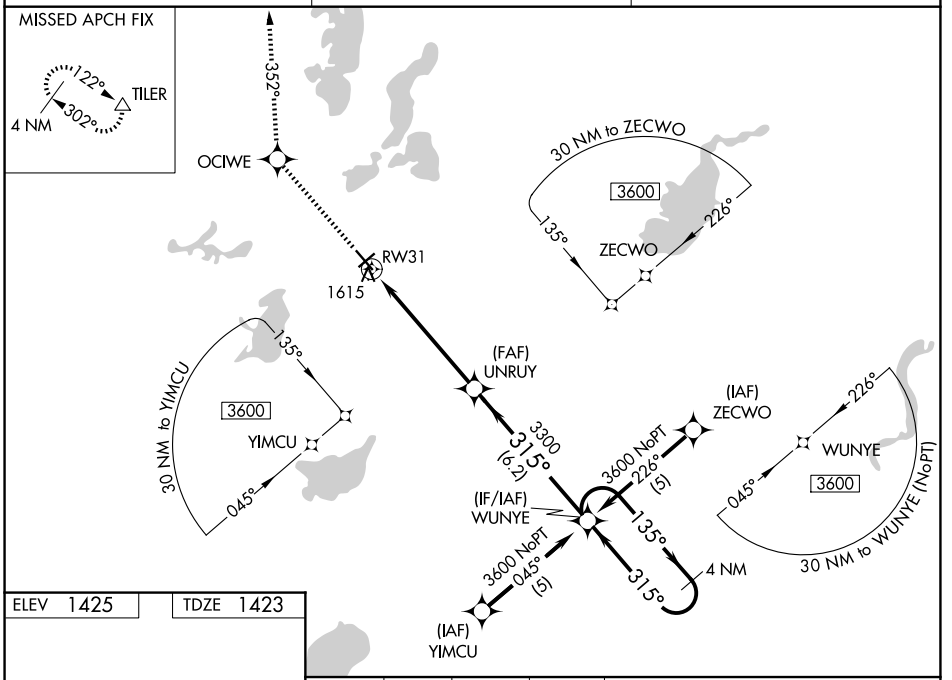

ELEV 1425	TDZE 1423

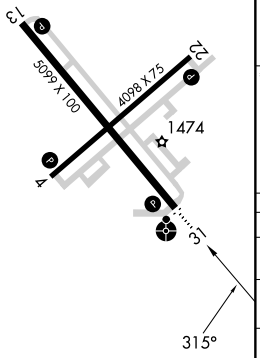

REIL Rwys 4, 13, and 22 L
MIRL Rwys 4-22 and 13-31 L

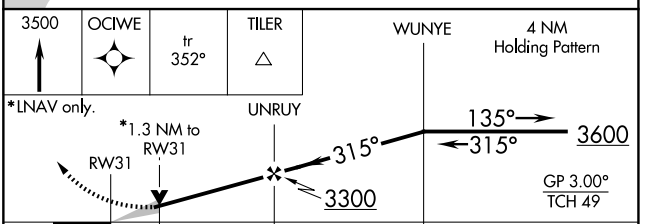

CATEGORY	A	B	C	D
LPV DA	1815-1¼ 392 (400-1¼)			
LNAV/VNAV DA	1885-1½ 462 (500-1½)			
LNAV MDA	1880-¾ 457 (500-¾)		1880-1¼ 457 (500-1¼)	1880-1½ 457 (500-1½)
CIRCLING	1920-1 495 (500-1)		1940-1½ 515 (600-1½)	2000-2 575 (600-2)

NC-1, 29 OCT 2026 to 26 NOV 2026
NC-1, 29 OCT 2026 to 26 NOV 2026