RNAV (GPS) RWY 13

BATON ROUGE METRO, RYAN FLD (BTR)


WAAS CH 72817 W13A	APP CRS 133°	Rwy Ldg 5720 TDZE 67 Apt Elev 70


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -5°C (23°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Hammond altimeter setting and increase all DA 91 feet and all MDA 100 feet, and increase LNAV/VNAV all Cats visibility ¼ mile, and LNAV Cats C and D visibility ⅜ mile. For inop MALSR when using Hammond altimeter setting, increase LPV all Cats visibility to ⅞ mile, LNAV Cat C and D visibility to 1⅝ mile. Baro-VNAV and VDP NA when using Hammond altimeter setting.


MALSR

MISSED APPROACH: Climb to 2300 direct FADAD and hold.

ATIS	BATON ROUGE APP CON ★	RYAN TOWER ★	GND CON	UNICOM
125.2	120.3 278.3	118.45 (CTAF) L 257.8	121.9	122.95

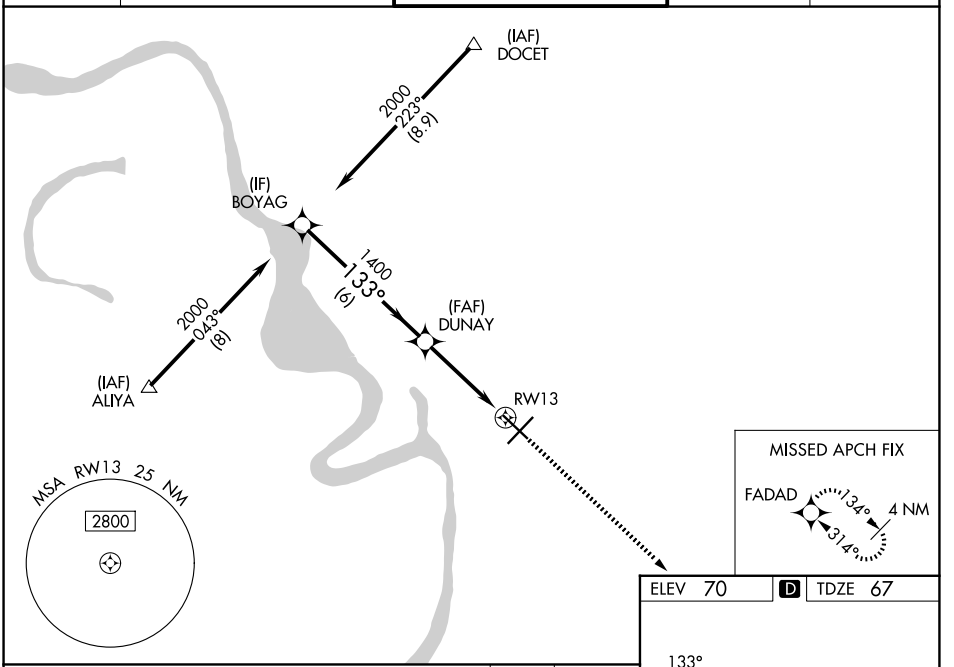

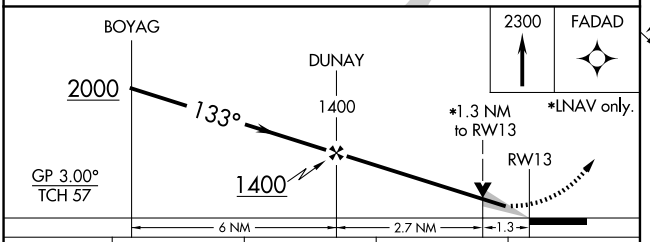



CATEGORY	A	B	C	D
LPV DA	267-½ 200 (200-½)			
LNAV/VNAV DA	465-⅞ 398 (400-⅞)			
LNAV MDA	540-½ 473 (500-½)		540-1 473 (500-1)	
CIRCLING	560-1 490 (500-1)	660-1 590 (600-1)	780-2 710 (800-2)	840-2½ 770 (800-2½)

TDZL/RCLS Rwy 22
HIRL Rwys 13-31 and 4-22 L

SC-4, 29 OCT 2026 to 26 NOV 2026
SC-4, 29 OCT 2026 to 26 NOV 2026