RNAV (GPS) RWY 5L

BATTLE CREEK EXEC AT KELLOGG FLD (BTL)


WAAS	APP CRS	Rwy Ldg	10004
CH 61220	047°	TDZE	952
W05A		Apt Elev	952


RNP APCH - GPS.


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. Circling to Rwy 5R, 23L and 31 NA at night. When local altimeter setting not received, use Grand Rapids altimeter setting and increase LPV DA to 1425 feet and all visibilities ⅜ SM; increase LNAV/VNAV DA to 1361 feet and all visibilities ¼ SM; increase all MDAs 120 feet and LNAV visibility Cat C and D ⅜ SM and Circling visibility Cat C and D ½ SM. VDP and Baro-VNAV NA when using Grand Rapids altimeter setting. Rwy 5L helicopter visibility reduction below ¾ SM NA.

MISSED APPROACH: Climb to 2500 direct WIPIL and hold.

ATIS	GREAT LAKES APP CON★	BATTLE CREEK TOWER★	GND CON	UNICOM
128.325	121.2 239.25	126.825 L (CTAF)	121.7	122.95

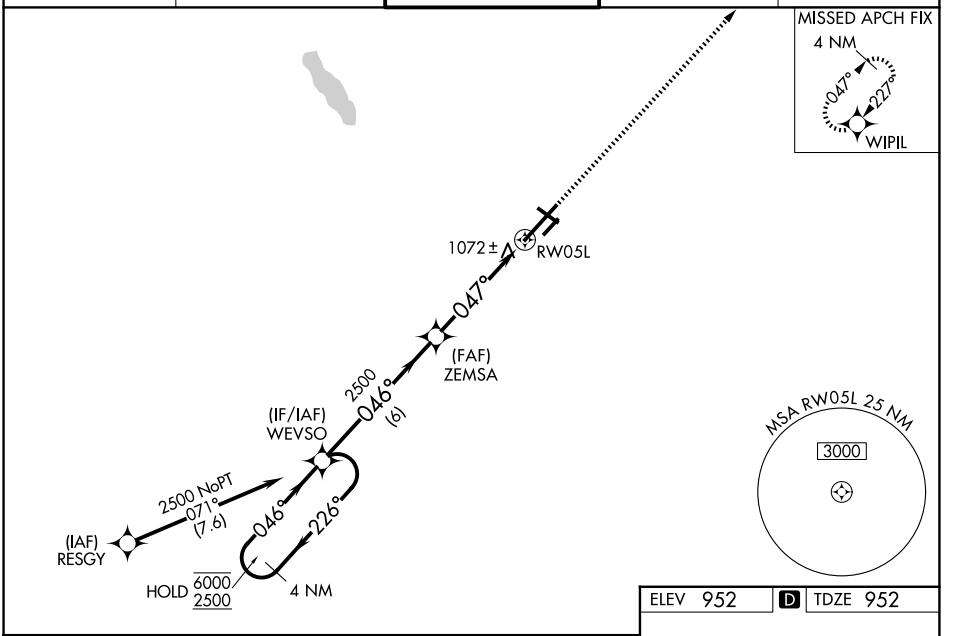

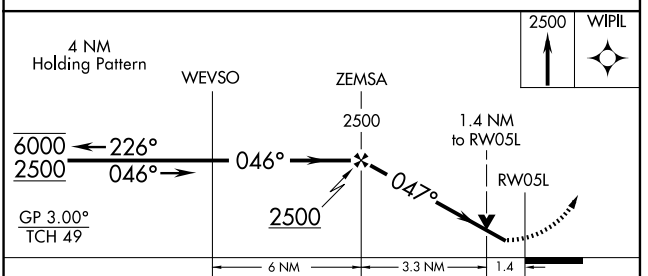

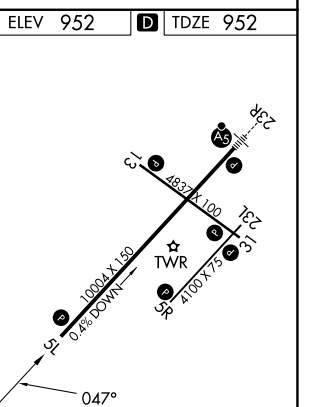

CATEGORY	A	B	C	D
LPV DA	1317-1		365 (400-1)	
LNAV/VNAV DA	1253-⅞		301 (400-⅞)	
LNAV MDA	1440-1 488 (500-1)		1440-1⅜ 488 (500-1⅜)	
CIRCLING	1440-1 488 (500-1)	1480-1 528 (600-1)	1520-1½ 568 (600-1½)	1520-2 568 (600-2)

HIRL Rwy 5L-23R L
MIRL Rwys 13-31 and 5R-23L L
REIL Rwys 5L, 5R, 13, 23L and 31L

EC-1, 29 OCT 2026 to 26 NOV 2026
EC-1, 29 OCT 2026 to 26 NOV 2026